


Planetary Gearhead GP 22 HD Ø22 mm, 2.0–4.0 Nm

Heavy Duty – for application in oil

gear

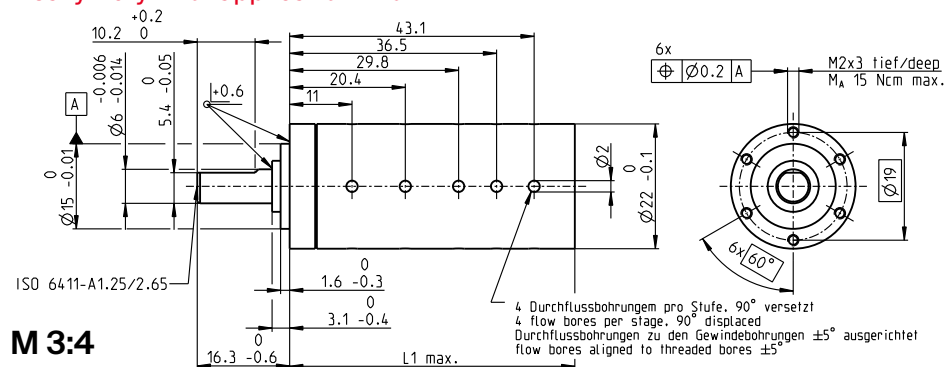

M 3:4

Technical data

Planetary Gearhead	straight teeth
Output shaft	stainless steel, hardened
Bearing at output	ball bearing
Radial play, 10 mm from flange	max. 0.2 mm
Axial play	max. 0.1 mm
Max. axial load (dynamic)	100 N
Max. force for press fits	100 N
Direction of rotation, drive to output	=
Max. continuous input speed	11'000 rpm
Recommended temperature range	-55...+200°C
Extended range as option	-55...+260°C
Number of stages	1 2 3 4 5
Max. radial load, 10 mm from flange	55 N 85 N 100 N 110 N 110 N

- ☒ Stock program
☐ Standard program
☐ Special program (on request)

Part numbers

Gearhead data (provisional)	410657	410637	410558	416698	409667	416709	416738	416211	416747	416753	416760
1 Reduction	3.8:1	14:1	53:1	104:1	198:1	370:1	561:1	742:1	1386:1	1798:1	3027:1
2 Absolute reduction	15/4	225/16	3375/64	87723/845	50625/256	10558001/28561	236852/4225	759375/1024	158340015/114244	373977/208	63950067/2125
3 Max. motor shaft diameter	mm 4	4	4	3.2	4	3.2	3.2	4	3.2	3.2	3.2
Part numbers	416684	416686	416693	416699	416703	416710	416739	416742	416748	416754	416762
1 Reduction	4.4:1	16:1	62:1	109:1	231:1	389:1	590:1	867:1	1460:1	1996:1	3189:1
2 Absolute reduction	57/13	855/52	12825/208	2187/20	192375/632	263169/676	59049/100	2885625/3328	3947535/2704	285012027/142805	1594323/500
3 Max. motor shaft diameter	mm 3.2	3.2	3.2	4	3.2	3.2	4	3.2	3.2	3.2	4
Part numbers	416687	416694	416701	416704	416711	416740	416743	416749	416756	416763	
1 Reduction	19:1	72:1	128:1	270:1	410:1	690:1	1014:1	1538:1	2102:1	3728:1	
2 Absolute reduction	3249/169	48735/676	41553/325	731025/2704	6561/16	112193/1625	10985375/10816	98415/64	7105563/3380	30292137/6125	
3 Max. motor shaft diameter	mm 3.2	3.2	3.2	3.2	4	3.2	4	3.2	4.0	3.2	3.2
Part numbers	416688	416695		416706	416736		416744	416751	416757		
1 Reduction	20:1	76:1		285:1	455:1		1068:1	1621:1	2214:1		
2 Absolute reduction	81/4	1215/16		18225/64	5000211/10985		273375/256	601692051/31293	177147/80		
3 Max. motor shaft diameter	mm 4	4		4	3.2		4	3.2	4		
Part numbers	416689	416696		416707	416737		416745	416752	416758		
1 Reduction	24:1	84:1		316:1	479:1		1185:1	1707:1	2458:1		
2 Absolute reduction	1539/65	185193/2197		2777895/6788	124659/260		41668425/35152	15000633/8788	135005687/64925		
3 Max. motor shaft diameter	mm 3.2	3.2		3.2	3.2		3.2	3.2	3.2		
Part numbers		416697		416708			416746		416759		
1 Reduction		89:1		333:1			1249:1		2589:1		
2 Absolute reduction		461/62		69259/208			1038825/832		3365793/300		
3 Max. motor shaft diameter	mm 3.2	3.2		3.2			3.2		3.2		
4 Number of stages	1	2	3	3	4	4	4	5	5	5	5
5 Max. continuous torque	Nm 2	2.4	3	3	3.4	3.4	3.4	4	4	4	4
6 Max. intermittent torque at gear output	Nm 2.5	3	3.5	3.5	3.8	3.8	3.8	4.4	4.4	4.4	4.4
15 Max. overload torque ¹⁾	Nm 6	9	12	12	12	12	12	12	12	12	12
7 Max. efficiency	% 95	87	78	78	65	65	65	52	52	52	52
8 Weight	g 46	65	82	82	96	96	96	110	110	110	110
9 Average backlash no load	° 1.0	1.2	1.6	1.6	2.0	2.0	2.0	2.5	2.5	2.5	2.5
10 Mass inertia	gcm ² 0.6	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
11 Gearhead length L1	mm 20.6	29.7	38.2	38.2	45.0	45.0	45.0	51.8	51.8	51.8	51.8
13 Max. transmittable power (continuous)	W 160	100	40	40	20	20	20	6	6	6	6
14 Max. transmittable power (intermittent)	W 240	150	60	60	30	30	30	9	9	9	9

1) Reduced expected life span



Modular system											
+ Motor	Page	+ Sensor/Brake	Page	Overall length [mm] = Motor length + gearhead length + (sensor/brake) + assembly parts							
EC 22, 240 W, A	270			110.5	119.5	128.0	128.0	135.0	135.0	135.0	141.5
EC 22, 240 W, B	270			98.1	107.5	116.0	116.0	122.4	122.4	122.4	129.5

Application	Important Notice
General	This gearhead has been designed for applications in oil and is only equipped with minimum lubrication. Therefore it is not permitted to use it under normal air conditions.
- extreme temperature applications	
- vibration tested according to MIL-STD810F/Jan2000 Fig. 514.5C-10	
- operation in oil and high pressure	
Oil & Gas Industry	
- oil, gas and geothermal wells	