


Servo Controller

ESCON² Module 60/30

Hardware Reference

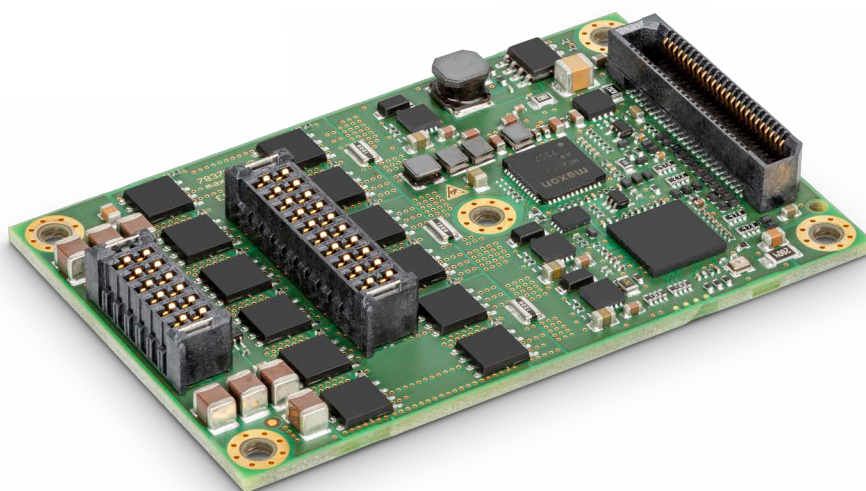

escon.maxongroup.com

TABLE OF CONTENTS

1	ABOUT	5
1.1	About this document	5
1.2	About the device	7
1.3	About the safety precautions	8
2	SPECIFICATIONS	9
2.1	Technical data	9
2.2	Thermal data	10
2.2.1	Test setup for data collection	10
2.2.2	Derating of output current (operation without additional heat sink).	11
2.2.3	Operation with additional heatsink	12
2.2.4	Thermal accessories	12
2.2.5	Power dissipation and efficiency	13
2.3	Limitations	14
2.4	Dimensional drawing	14
2.5	Standards	15
3	SETUP	17
3.1	Generally applicable rules	17
3.2	Pin assignment	18
3.3	Connection specifications	20
3.3.1	Power supply	20
3.3.2	Logic supply	21
3.3.3	Output voltages	22
3.3.4	Motor	22
3.3.5	Sensor 1 Hall sensor	23
3.3.6	Sensor 2 Encoder / I/Os	24
3.3.7	Digital I/Os	32
3.3.8	Analog I/Os	34

READ THIS FIRST

These instructions are for qualified technical personnel only. Before you start any work:

- Read this manual carefully.
- Make sure that you understand this manual.
- Follow all instructions in this manual.

The product is partly completed machinery according to EU Directive 2006/42/EC, Article 2, Clause (g). You must incorporate it into or assemble it with other machinery or other partly completed machinery or equipment.

You must not put the device into service unless all these conditions are met:

- The complete machinery complies with all applicable requirements of EU Directive 2006/42/EC.
- The complete machinery fulfills all applicable health and safety requirements.
- All interfaces are implemented and comply with the requirements given in this manual.

3.3.9	Serial Communication Interface (SCI) / RS232	37
3.3.10	CAN	38
3.3.11	USB	39
3.3.12	Motor temperature sensor (future release)	40
3.4	Status indicators	41
4	MOTHERBOARD DESIGN GUIDE	43
4.1	Connection accessory - ready-to-use connector board	43
4.2	Requirements for components of third-party suppliers	43
4.2.1	Terminal headers	43
4.2.2	Power supply voltage	44
4.2.3	Logic supply voltage	45
4.2.4	Motor chokes	46
4.2.5	USB interface	47
4.2.6	CAN interface	48
4.2.7	Serial Communication Interface (SCI) / RS232	49
4.2.8	RS232 Interface	49
4.2.9	RS422 transceiver for differential SSI, BiSS C or high-speed I/Os signals	50
4.2.10	Digital outputs load switch	50
4.2.11	LEDs for device status indication	51
4.2.12	Recommended components and manufacturers	52
4.3	Design guidelines	54
4.3.1	Ground	54
4.3.2	Layout	55
4.3.3	SMT footprint	55
5	WIRING	57
5.1	Possible combinations to connect a motor	57
5.2	Main wiring diagram	59
5.3	Cabling	60
5.4	Excerpts	61
5.4.1	Power supply	61
5.4.2	Logic supply	61
5.4.3	DC motor	61
5.4.4	EC (BLDC) motor	62
5.4.5	Sensor 1 Hall sensor	62
5.4.6	Sensor 2 Encoder / I/Os	63
5.4.7	Digital I/Os	64
5.4.8	Analog I/Os	64
5.4.9	SCI / RS232	65
5.4.10	CAN	65
5.4.11	USB	66
5.4.12	Motor temperature sensor (future release)	67
	LIST OF FIGURES	69

LIST OF TABLES	71
INDEX	73

1 ABOUT


1.1 About this document

1.1.1 Intended purpose

This document familiarizes you with the ESCON2 Module 60/30 Servo Controller. It describes the tasks for safe and proper installation and commissioning. Follow the instructions:

- to avoid dangerous situations,
- to keep installation and/or commissioning time at a minimum,
- to increase reliability and service life of the described equipment.

This document is part of a documentation set. It includes performance data, specifications, standards information, connection details, pin assignments, and wiring examples. The overview below shows the documentation hierarchy and how its parts are related:

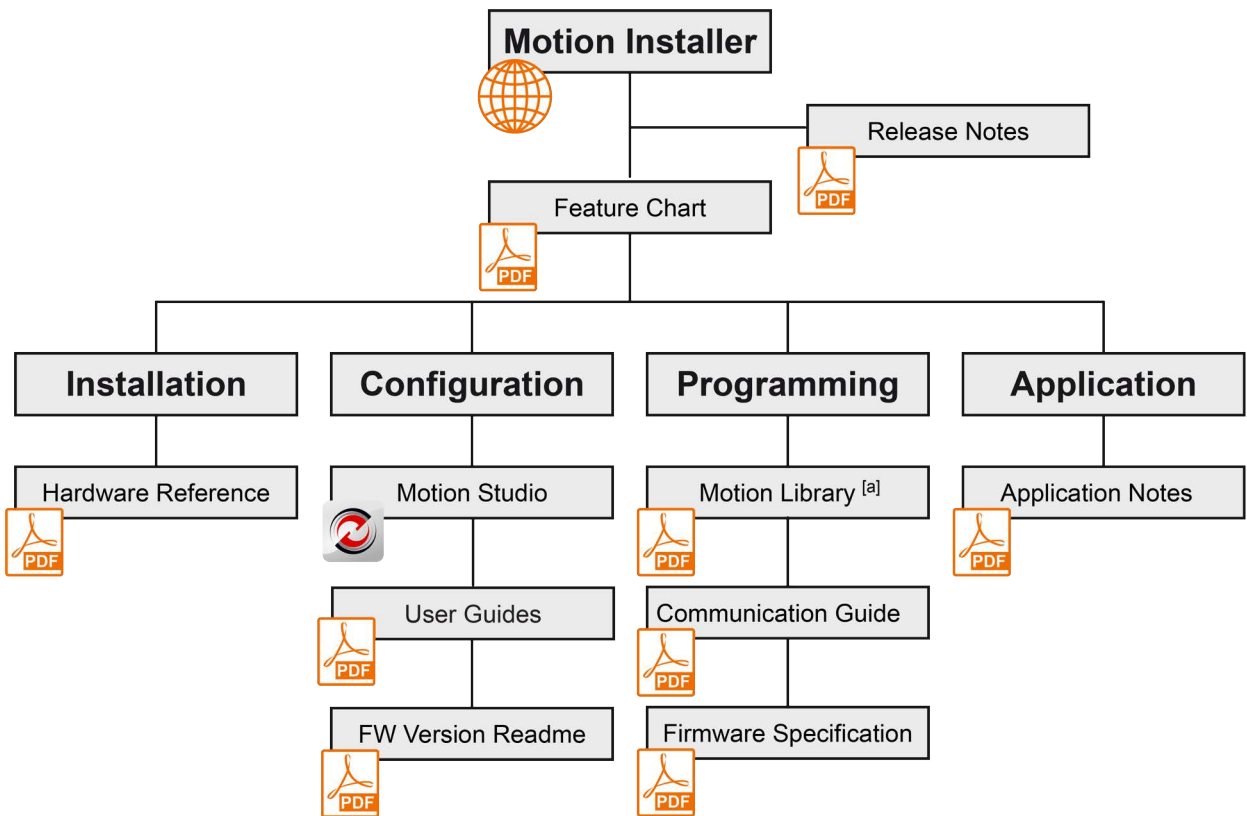

[a] including software programming examples

Figure 1-1 Documentation structure

Find the latest edition of this document, along with additional documentation and software for ESCON2 Servo Controller, at: <http://escon.maxongroup.com>

1.1.2 Target audience

This document is intended for trained and skilled personnel. It provides information on how to understand and perform the respective tasks and duties.

1.1.3 How to use

Follow these notations and codes throughout the document.

Notation	Meaning
ESCON2	stands for «ESCON2 Servo Controller»
«Abcd»	indicating a title or a name (such as of document, product, mode, etc.)
(n)	refers to an item (such as a part number, list items, etc.)
*	refers to an internal value
➔	denotes “check”, “see”, “see also”, “take note of” or “go to”

Table 1-1 Notations used in this document

1.1.4 Symbols & signs

This document uses the following symbols and signs:

Type	Symbol	Meaning
Safety alert DANGER		Indicates an imminent hazardous situation . If not avoided, it will result in death or serious injury .
WARNING		Indicates a potential hazardous situation . If not avoided, it can result in death or serious injury .
CAUTION		Indicates a probable hazardous situation or calls the attention to unsafe practices. If not avoided, it may result in injury .
Prohibited action	 (typical)	Indicates a dangerous action. Hence, you must not!
Mandatory action	 (typical)	Indicates a mandatory action. Hence, you must!
Requirement, Note, Remark		Indicates an activity you must perform prior to continuing, or gives information on a particular point that must be observed.
Best practice		Indicates an advice or recommendation on the easiest and best way to further proceed.
Material Damage		Indicates information particular to possible damage of the equipment.

Table 1-2 Symbols and signs

1.1.5 Trademarks and brand names

All trademarks, brand names or other signs mentioned in this manual remain the property of their respective owners. They are protected by trademark, copyright, and/or other applicable laws. For easier reading, no symbols such as ® or ™ are being used with respect to the trademarks or brand names mentioned herein.

Nothing in this manual shall be construed as granting any rights with respect to the mentioned trademarks, brand named or other signs, including without limitation neither the right to use the mentioned trademarks, brand names or other signs without permission of the respective owners.

The trademarks, brand names or other signs are mentioned in this manual solely for information or identification purposes.

1.1.6 Copyright

© 2026 maxon. All rights reserved. Any use, in particular reproduction, editing, translation, and copying, without prior written approval is not permitted (contact: maxon international ltd., Brünigstrasse 220, CH-6072 Sachseln, +41 41 666 15 00, www.maxongroup.com). Infringements will be prosecuted under civil and criminal law. The mentioned trademarks belong to their respective owners and are protected under trademark laws. Subject to change without prior notice.

CCMC | ESCON2 Module 60/30 Hardware Reference | Edition 2026-09 | DocID rel13814

1.1.7 Sources for additional information

For further details and additional information, please refer to the resources listed below:

Ref. no.	Reference
[1]	maxon: ESCON2 Communication Guide http://escon.maxongroup.com
[2]	maxon: ESCON2 Firmware Specification http://escon.maxongroup.com
[3]	maxon: ESCON2 Compact 60/30 Hardware Reference http://escon.maxongroup.com
[4]	maxon: ESCON2 Module 60/30 motherboard HDK (Altium Reference Design) http://escon.maxongroup.com

Table 1-3 Sources for additional information

1.2 About the device

The ESCON2 Module 60/30 is a small, powerful 4-quadrant PWM servo controller. Its high power density allows flexible use for brushed DC motors and brushless EC (BLDC) motors up to 1'800 Watts. It supports various feedback options, such as Hall sensors, incremental encoders, and absolute sensors for many drive applications.

The device is designed to be controlled by analog and digital set values, or as a slave node in a CANopen network. You can also operate it via any USB or RS232 communication port of a Windows workstation. It has extensive analog and digital I/O functions.

Latest technology, such as field-oriented control (FOC), acceleration and velocity feed forward, in combination with highest control cycle rates allow sophisticated, ease-of-use motion control.

The miniaturized OEM plug-in module integrates easily into complex applications. A suitable Connector Board provides standard industry connector interfaces for commissioning, or installations where high integration is not necessary. The ESCON2 Module 60/30 (P/N 783722), together with the connector board ESCON2 CB 60/30 (P/N 783729), forms the ESCON2 Compact 60/30 (P/N 783734), which can be ordered as a preassembled unit directly from maxon.

You can find the latest edition of this document on the Internet: →<http://escon.maxongroup.com>. This website also gives you access to related documents and software for ESCON2 servo controllers.



In addition, you can watch video tutorials in the ESCON video library. These tutorials show how to start with «Motion Studio». They also show how to set up communication interfaces, configure the controller, and give helpful tips, etc. Explore the video library on Vimeo: →<https://vimeo.com/album/4646396>

1.3 About the safety precautions

- Read and understand the note → «READ THIS FIRST»!
- Do not start any work unless you have the required skills → Chapter “1.1.2 Target audience” on page 1-5.
- Refer to → Chapter “1.1.4 Symbols & signs” on page 1-6 to understand the symbols used.
- Follow all applicable health, safety, accident prevention, and environmental protection regulations for your country and work site.



DANGER

High voltage and/or electrical shock

Touching live wires can cause death or serious injuries.

- Treat all power cables as live unless proven otherwise.
- Ensure neither end of the cable is connected to live power.
- Ensure the power source cannot be turned on while you work.
- Follow lock-out/tag-out procedures.



Requirements

- Install all devices and components according to local regulations.
- Electronic devices are not fail-safe. Install separate monitoring and safety equipment for each machine. If the machine has a failure, the drive system must go into a safe state and stay in this state. Possible failures include incorrect operation, failure of the control unit, failure of the cables, or other faults.
- Do not repair any components that maxon supplies.



Electrostatic sensitive device (ESD)

- Observe precautions for handling Electrostatic sensitive devices.
- Handle the device with care.

2 SPECIFICATIONS

2.1 Technical data

ESCON2 Module 60/30 (P/N 783722)		
Electrical data	Nominal power supply voltage V_{CC}	10...60 VDC
	Nominal logic supply voltage V_C	10...60 VDC
	Absolute supply voltage V_{min} / V_{max}	8 VDC / 62 VDC
	Maximum output voltage	$0.985 \times V_{CC}$
	Output current $I_{cont} / I_{max} (< 4 \text{ s})$	30 A / 60 A (current measurement resolution: 53.71 mA)
	Pulse Width Modulation (PWM) frequency	50 kHz
	Sampling rate PI current controller	50 kHz
	Sampling rate PI speed controller	10 kHz
	Sampling rate analog input	50 kHz
	Max. efficiency	98.5 % → Figure 2-5
	Max. speed DC motor	Is limited by the max. permissible motor speed and the max. output voltage of the controller.
	Max. speed EC motor	120,000 rpm (FOC, 1 pole pair). Can be limited by the max. permissible motor speed and the max. output voltage of the controller.
	Built-in motor choke per phase	—
Inputs & outputs	Sensor 1 Digital Hall sensor H1, H2, H3	0...24 VDC (internal pull-up)
	Sensor 2 (choice between multiple functions): • Digital incremental encoder • SSI absolute encoder • BISS C unidirectional absolute encoder • High-speed digital inputs 1...2 • High-speed digital inputs 3...4 • High-speed digital output 1	2-channel, EIA/RS422, max. 6.67 MHz 0.4...2 MHz (single-ended, configurable) 0.4...4 MHz (single-ended, configurable) EIA/RS422, max. 6.67 MHz Logic: 0...12 VDC, max. 6.25 MHz 3.3 VDC / $R_i = 270 \Omega$
	Digital Inputs 1...4	Logic: 0...30 VDC, inputs 1...2 PWM capable
	Digital Outputs 1...2	3.3 VDC / $R_i = 270 \Omega$, PWM capable
	Analog Inputs 1...2	Resolution 12-bit, ± 10 VDC (differential), 10 kHz
	Analog Outputs 1...2	Resolution 12-bit, ± 4 VDC (referenced to GND), 25 kHz
	Motor temperature sensor [a]	Resolution 12-bit, 0...3.3 VDC (internal pull-up)
Voltage outputs	Sensor supply voltage V_{Sensor}	5 VDC / $I_L \leq 145 \text{ mA}$
	Peripheral supply voltage $V_{Peripheral}$	3.3 VDC / $I_L \leq 20 \text{ mA}$ (unprotected)

Continued on next page.

ESCON2 Module 60/30 (P/N 783722)			
Motor connections	DC motor		+ Motor, – Motor
	EC motor		Motor winding 1, Motor winding 2, Motor winding 3
Communication interfaces	CAN		Max. 1 Mbit/s
	RS232		Max. 115'200 bit/s, external transceiver required
	USB		12 Mbit/s (Full Speed)
Status indicators	Device status		external LEDs required
Mechanical data	Dimensions (L × W × H)		67 × 43 × 7.8 mm
	Weight (approx.)		19 g
	Mounting		Pluggable (using sockets) and M2.5 screws
Environmental conditions	Temperature	Operation	–40...+25 °C
		Extended range [b]	+25...+75 °C Derating: approx. –0.506 A/°C → Figure 2-2 with additional heatsink: → Figure 2-3
		Storage	–40...+85 °C
	Altitude [c]	Operation	0...500 m MSL
		Extended range [b]	500...10'000 m MSL Derating → Figure 2-2
	Humidity		5...90 % (condensation not permitted)

- [a] The functionality will be available with a future firmware release.
- [b] Operation within the extended range is permitted. However, a respective derating (declination of output current I_{cont}) as to the stated values will apply.
- [c] Operating altitude in meters above Mean Sea Level, MSL.

Table 2-4 Technical data

2.2 Thermal data



Mandatory operation within the specified limits

- Operation within the specified thermal limits is mandatory.
- If the ambient temperature exceeds the specified limits, thermal overload can occur even at low output currents.

2.2.1 Test setup for data collection

Unless otherwise specified, the thermal data has been obtained using the ESCON2 Compact 60/30 (P/N 783734). This variant includes the Module along with the thermal accessories. For details, refer to → Chapter “2.2.4 Thermal accessories” on page 2-12 and for the Connector Board, refer to → Chapter “4.1 Connection accessory - ready-to-use connector board” on page 4-43. This configuration is intended to reproduce the mounting on a metal structure with a motherboard. The unit was oriented with the connections facing upward. It was placed on thermally poorly conductive supports, effectively floating in air.

2.2.2 Derating of output current (operation without additional heat sink)

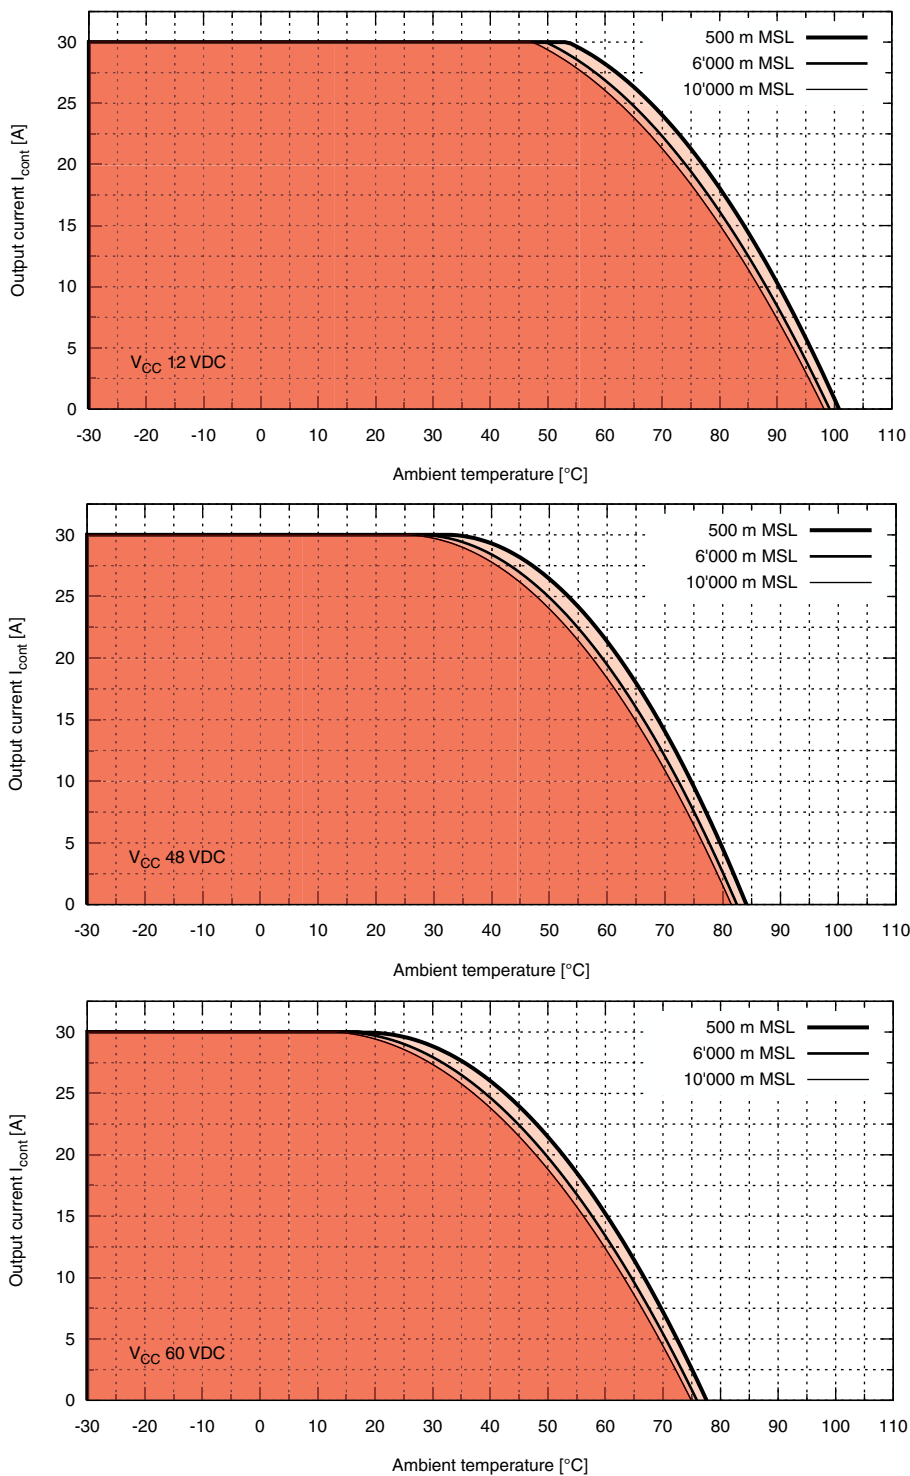


Figure 2-2 Derating of output current (operation without additional heatsink)

2.2.3 Operation with additional heatsink

During data collection in this chapter, the unit was placed on its side. This position allows heat to flow upward from the additional heatsink, promoting effective passive cooling at the top.

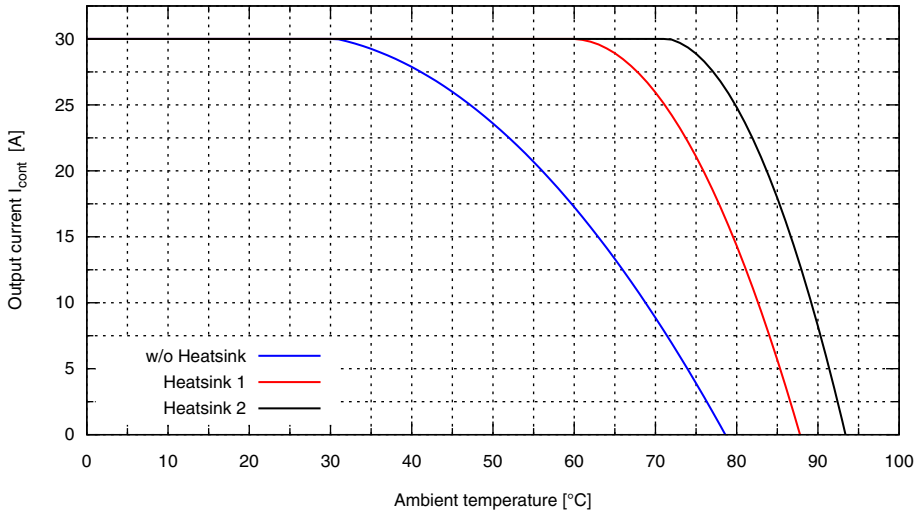


Figure 2-3 Extended operation @ V_{CC} 60 VDC with additional heatsink

Heatsink	Manufacturer	Type	Dimensions [mm]	Thermal resistance R _{th} [K/W]
1	Fischer Elektronik GmbH	SK 81 50 SA	50 × 100 × 15	3
2	Fischer Elektronik GmbH	SK 92 50 AL	50 × 100 × 40	1.75

Table 2-5 Heatsink – tested components

2.2.4 Thermal accessories

maxon offers a thermal pad and a heat spreader as accessories which both perfectly fit the ESCON2 Module 60/30.

Specifications		
ESCON2 Module 60/30 Thermal Pad (P/N 802197)	Dimensions (L × W × H)	67 × 43 × 0.23 mm
	Mounting	5 holes ø2.7 mm Hole pattern corresponds the ESCON2 Module 60/30 design →Chapter “2.4 Dimensional drawing” on page 2-14
ESCON2 Module 60/30 Heat Spreader (P/N 816161)	Dimensions (L × W × H)	85 × 43 × 11 mm (with preinstalled threaded studs) Height/thickness without studs is 3 mm
	Mounting	4 slotted holes for M3 screws for mounting the heat spreader 4 threaded studs M2.5 and 1 threaded hole M2.5 for mounting the ESCON2 Module 60/30
	Material	Aluminum alloy

Table 2-6 Thermal accessories – specification

CAD files are available on the maxon website. Both components are used in the ready-to-connect unit ESCON2 Compact 60/30 (P/N 783734).

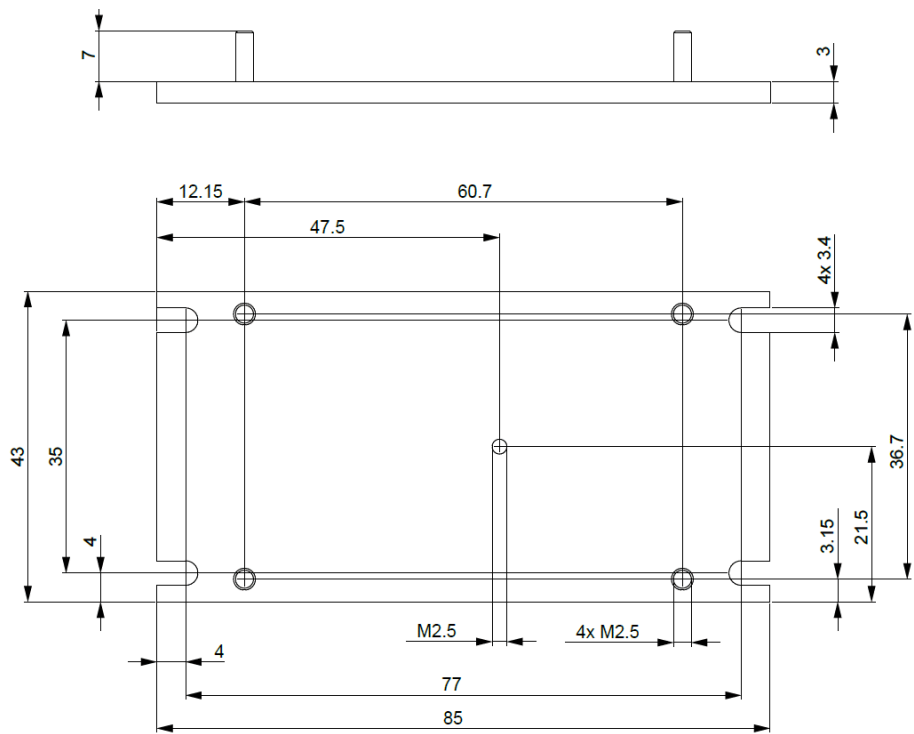


Figure 2-4 Heat spreader dimensional drawing [mm]

2.2.5 Power dissipation and efficiency

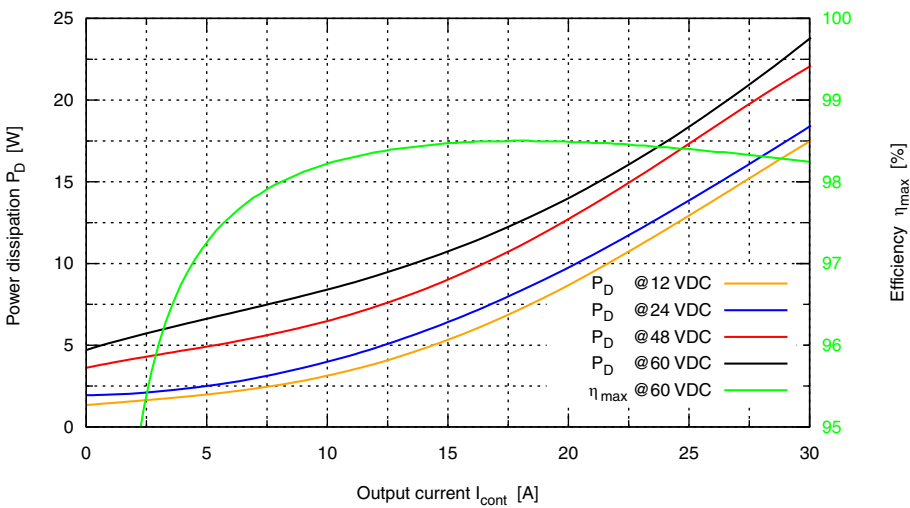


Figure 2-5 Power dissipation and efficiency

2.3 Limitations

Functionality		Switch-off threshold [a]	Recovery threshold [b]
Undervoltage		7.5 VDC	7.75 VDC
Overvoltage		65 VDC	64 VDC
Overcurrent		96 A	—
Thermal overload	logic	108 °C	98 °C
	power stage	110 °C	—

[a] The controller triggers the corresponding fault reaction. The controller changes to the disabled state. Refer to ➔ESCON2 Firmware Specification [2].

[b] The system allows you to reset the fault.

Table 2-7 Limitations

The device has a configurable output current limit and an overcurrent protection function. This protects the controller in case of a short circuit in a motor winding or a damaged power stage. The undervoltage, overvoltage, and thermal overload power stage protection limits are also configurable. For the thermal overload power stage protection, a linear derating of the maximum output current is implemented, which starts 10 °C below the switch-off threshold. For more information, see the ➔maxon: ESCON2 Firmware Specification [2].

2.4 Dimensional drawing

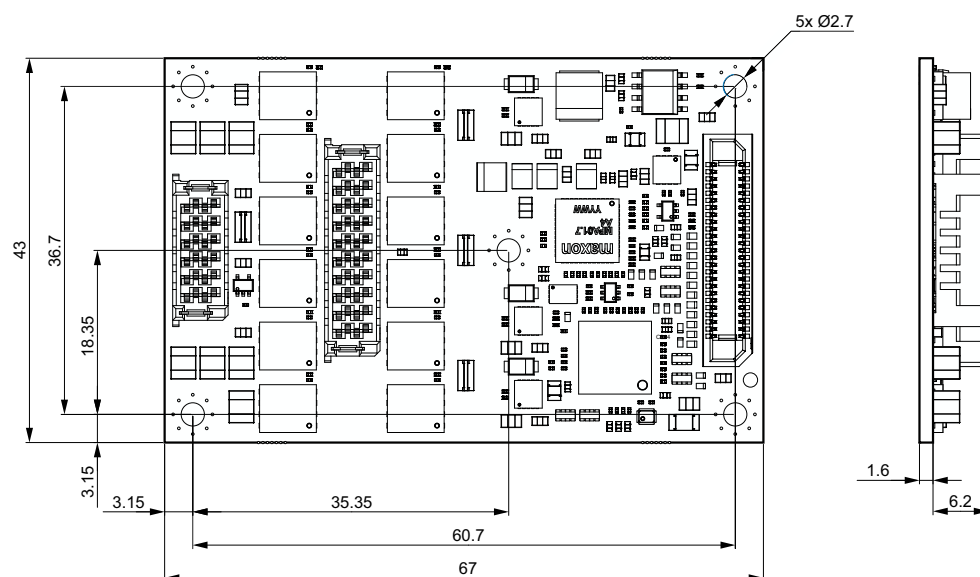


Figure 2-6 Dimensional drawing [mm]

For more information about motherboard design, refer to Chapter ➔4 Motherboard design guide and the ➔maxon: ESCON2 Module 60/30 motherboard HDK (Altium Reference Design) [4].

2.5 Standards

The described device has been successfully tested for compliance with the standards listed below. Only the complete system (fully operational equipment with all components, such as the motor, servo controller, power supply unit, EMC filter, and cabling) can undergo an EMC test to ensure interference-free operation.



Important notice

Compliance of the device with the mentioned standards does not guarantee compliance in the final, ready-to-operate setup. To achieve compliance for your operational system, you must perform EMC testing on the complete equipment as a whole.

Electromagnetic compatibility		
Generic	IEC/EN 61000-6-2	Immunity for industrial environments
	IEC/EN 61000-6-3	Emission standard for residential, commercial and light-industrial environments
Applied	IEC/EN 55022 (CISPR32)	Radio disturbance characteristics / radio interference
	IEC/EN 61000-4-3	Radiated, radio-frequency, electromagnetic field immunity test >10 V/m
	IEC/EN 61000-4-4	Electrical fast transient/burst immunity test ±2 kV
	IEC/EN 61000-4-6	Immunity to conducted disturbances, induced by radio-frequency fields 10 Vrms
Others		
Environment	IEC/EN 60068-2-6	Environmental testing – Test Fc: Vibration (sinusoidal, 10...500 Hz, 20 m/s ²)
	MIL-STD-810F	Random transport (10...500 Hz up to 2.53 g _{rms})
Safety	UL File Number	Unassembled printed circuit board: E207844
Reliability	MIL-HDBK-217F [a]	Reliability prediction of electronic equipment Environment: Ground, benign (GB) Ambient temperature: 298 K (25 °C) Component stress: In accordance with circuit diagram and nominal power Mean Time Between Failures (MTBF): 317'416 hours

[a] The reliability calculation is based on MIL-HDBK-217F. More accurate component manufacturer data has been used whenever possible.

Table 2-8 Standards

••page intentionally left blank••

3 SETUP

IMPORTANT NOTICE: PREREQUISITES FOR INSTALLATION PERMISSION

The **ESCON2 Module 60/30** is considered partly completed machinery according to EU Directive 2006/42/EC, Article 2, Clause (g). **It is intended to be incorporated into or assembled with other machinery or partly completed machinery or equipment.**



WARNING

Risk of injury

Operating the device without full compliance of the surrounding system with EU Directive 2006/42/EC may cause serious injuries.

- Do not operate the device unless you are certain that the other machinery fully complies with the EU directive's requirements.
- Do not operate the device, unless the other machinery fulfills all relevant health and safety aspects!
- Do not operate the device unless all respective interfaces have been established and fulfill the requirements stated in this document!



CAUTION

Burn hazard

Hot surfaces can cause burns.

- During operation, some parts of the device become very hot. Contact with these parts can burn your skin.
- Disconnect the power supply and secure it. Wait for the surface to cool before you do maintenance.

3.1 Generally applicable rules



Maximum permitted supply voltage

- Make sure that the power supply voltage is between 10...60 VDC.
- Supply voltages above 65 VDC or incorrect polarity will destroy the unit.
- The necessary output current depends on the load torque. The output current limits are:
 - continuous max. 30 A
 - short-time (acceleration) max. 60 A (< 4 s)



Best practice

Keep the motor mechanically disconnected during the setup and adjustment phase.

3.2 Pin assignment

For in-depth details on connections →Chapter “3.3 Connection specifications” on page 3-20.

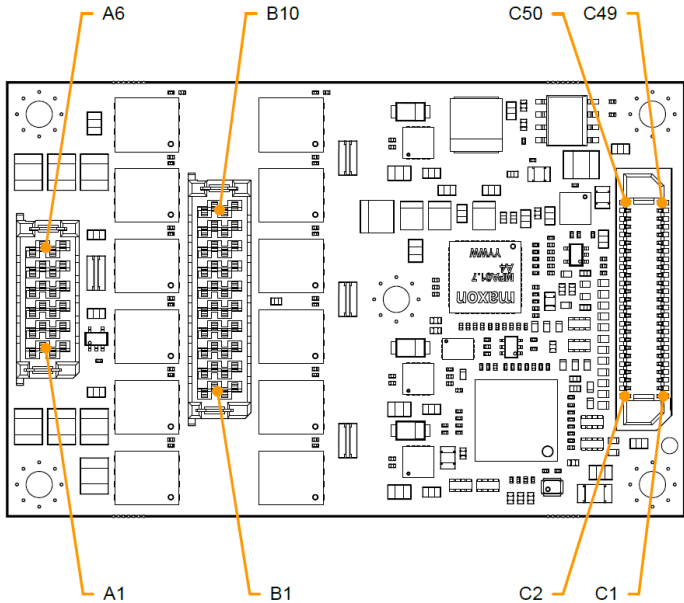


Figure 3-7 Pin assignment



Important notice

How to read the following data
The column «Pin» refers to the socket pin number.
Example: **A1...A3** means socket A, pins 1 thru 3.

Pin	Signal	Description
A1...A3 [a]	GND	Ground
A4...A6 [a]	V _{CC}	Power supply voltage input (10...60 VDC)

[a] Connect all pins in respect to the individual pin current rating.

Table 3-9 Pin assignment A1...A6

Pin	Signal	Description
B1...B3 [a]	Motor winding 1	EC motor: Winding 1
	Motor (+M)	DC motor: Motor +
B4...B7 [a]	Motor winding 2	EC motor: Winding 2
	Motor (-M)	DC motor: Motor -
B8...B10 [a]	Motor winding 3	EC motor: Winding 3
	-	DC motor: DO NOT CONNECT

[a] Connect all pins in respect to the individual pin current rating.

Table 3-10 Pin assignment B1...B10

Pin	Signal	Description
C1	V _C	Logic supply voltage input (10...60 VDC)
C2	V _{Sensor}	Sensor supply voltage output (5 VDC / I _L ≤ 145 mA)
C3	GND	Ground
C4	Channel A	Digital incremental encoder channel A
	HsDigIN1	High-speed digital input 1
C5	Hall sensor 1	Hall sensor 1 input
C6	Channel A\	Digital incremental encoder channel A complement
	HsDigIN1\	High-speed digital input 1 complement
C7	Hall sensor 2	Hall sensor 2 input
C8	Channel B	Digital incremental encoder channel B
	HsDigIN2	High-speed digital input 2
C9	Hall sensor 3	Hall sensor 3 input
C10	Channel B\	Digital incremental encoder channel B complement
	HsDigIN2\	High-speed digital input 2 complement
C11	LED red	LED red (warning/error) signal
C12	Data	Data (SSI, BiSS C)
	HsDigIN4	High-speed digital input 4
C13	LED green	LED green (operation) signal
C14	HsDigIN3	High-speed digital input 3
C15	-	For maxon internal use. DO NOT CONNECT
C16	GND	Ground
C17	Clock	Clock (SSI, BiSS C)
	HsDigOUT1	High-speed digital output 1
C18	AnIN1+	Analog input 1, positive signal
C19	DigIN1	Digital input 1
C20	AnIN1-	Analog input 1, negative signal
C21	DigIN2	Digital input 2
C22	AnIN2+	Analog input 2, positive signal
C23	DigIN3	Digital input 3
C24	AnIN2-	Analog input 2, negative signal
C25	DigIN4	Digital input 4
C26	AnOUT1	Analog output 1
C27	DigOUT1	Digital output 1
C28	AnOUT2	Analog output 2
C29	DigOUT2	Digital output 2
C30	MotorTemp	Motor temperature sensor input
C31	Auto bit rate	Automatic bit rate detection of CAN bus
C32	-	For maxon internal use. DO NOT CONNECT
C33	ID 1	CAN ID 1 (valence = 1)
C34	-	For maxon internal use. DO NOT CONNECT
C35	ID 2	CAN ID 2 (valence = 2)
C36	-	For maxon internal use. DO NOT CONNECT

Continued on next page.

Pin	Signal	Description
C37	ID 3	CAN ID 3 (valence = 4)
C38	V _{Peripheral}	Peripheral components supply voltage output (3.3 VDC / I _L ≤ 20 mA; unprotected)
C39	ID 4	CAN ID 4 (valence = 8)
C40	GND	Ground
C41	ID 5	CAN ID 5 (valence = 16)
C42	V _{Bus}	USB supply voltage input (5 VDC)
C43	ID 6	CAN ID 6 (valence = 32)
C44	USB_D+	USB Data+ (twisted pair with USB Data-)
C45	GND	Ground
C46	USB_D-	USB Data- (twisted pair with USB Data+)
C47	CAN high	CAN bus high line
C48	DSP_TxD	Serial communication interface transmit (UART)
C49	CAN low	CAN bus low line
C50	DSP_RxD	Serial communication interface receive (UART)

Table 3-11 Pin assignment C1...C50

3.3 Connection specifications

The actual connection depends on your drive system configuration and the type of motor you are using. Follow the description in the given order and choose the wiring diagram (→see Page 5-57) that best suits your components.



Important notice

How to read the following data

The column «Pin» refers to the socket pin number.

*Example: **A1...A3** means socket A, pins 1 thru 3.*

3.3.1 Power supply

Pin	Signal	Description
A1...A3 [a]	GND	Ground
A4...A6 [a]	V _{CC}	Power supply voltage input (10...60 VDC)

[a] Connect all pins in respect to the individual pin current rating.

Table 3-12 Power supply – Pin assignment

Power supply requirements	
Nominal supply voltage V _{CC}	10...60 VDC
Absolute supply voltage V _{CC}	min. 8 VDC / max. 62 VDC
Output current	Depending on load - continuous max. 30 A - short-time (acceleration) max. 60 A (< 4 s)

Table 3-13 Power supply requirements

- 1) Use the formula below to calculate the required voltage under load.
- 2) Choose a power supply according to the calculated voltage. Consider the following:
 - a) During braking of the load, the power supply must buffer the recovered kinetic energy (e.g., in a capacitor).
 - b) If using an electronically stabilized power supply, ensure the overcurrent protection circuit is inoperative within the operating range.



The formula already takes the following into account:

- Maximum PWM duty cycle: 98.5 %
- Controller's max. voltage drop of 1 V @ 30 A

KNOWN VALUES:

- Operating torque M [mNm]
- Operating speed n [rpm]
- Nominal motor voltage U_N [Volt]
- Motor no-load speed at U_N ; n_O [rpm]
- Speed/torque gradient of the motor $\Delta n/\Delta M$ [rpm/mNm]

SOUGHT VALUE:

- Supply voltage V_{CC} [Volt]

SOLUTION:

$$V_{CC} \geq \left[\frac{U_N}{n_O} \cdot \left(n + \frac{\Delta n}{\Delta M} \cdot M \right) \cdot \frac{1}{0.985} \right] + 1 [V]$$

3.3.2 Logic supply

Pin	Signal	Description
C1	V_C	Logic supply voltage input (10...60 VDC)
C3	GND	Ground

Table 3-14 Logic supply – Pin assignment

Logic supply requirements	
Nominal supply voltage V_C	10...60 VDC
Absolute supply voltage V_C	min. 8 VDC / max. 62 VDC
Min. output power	P_C min. 3 W

Table 3-15 Logic supply requirements

3.3.3 Output voltages

Two output voltages are provided for the supply of external devices or as input voltage for I/Os. Typically:

- The sensor supply voltage (V_{Sensor}) is used for Hall sensors, encoders, high-speed digital inputs, digital I/Os, or an external RS232 transceiver.
- The peripheral supply voltage ($V_{\text{Peripheral}}$) is used for an external RS422 transceiver or other external devices.

Pin	Signal	Description
C2	V_{Sensor}	Sensor supply voltage output (5 VDC / $I_L \leq 145$ mA)
C3	GND	Ground
C38	$V_{\text{Peripheral}}$	Peripheral components supply voltage output (3.3 VDC / $I_L \leq 20$ mA; unprotected)
C40	GND	Ground

Table 3-16 Output voltages – Pin assignment



Unprotected voltage output $V_{\text{Peripheral}}$

The peripheral supply voltage output ($V_{\text{Peripheral}}$) is unprotected. Avoid any signals on this interface, as they can cause damage.

3.3.4 Motor

The controller is set to drive either an EC motor (BLDC, brushless DC motor) or a DC motor (brushed DC motor).



Best practice

Keep the motor mechanically disconnected during the setup and adjustment phase.

Pin	Signal	Description
B1...B3 [a]	Motor winding 1	Winding 1
B4...B7 [a]	Motor winding 2	Winding 2
B8...B10 [a]	Motor winding 3	Winding 3

[a] Connect all pins in respect to the individual pin current rating.

Table 3-17 EC motor – Pin assignment

Pin	Signal	Description
B1...B3 [a]	Motor (+M)	Motor +
B4...B7 [a]	Motor (-M)	Motor -
B8...B10	-	DO NOT CONNECT

[a] Connect all pins in respect to the individual pin current rating.

Table 3-18 DC motor – Pin assignment

3.3.5 Sensor 1 Hall sensor

Pin	Signal	Description
C2	V _{Sensor}	Sensor supply voltage output (5 VDC / I _L ≤ 145 mA)
C3	GND	Ground
C5	Hall sensor 1	Hall sensor 1 input
C7	Hall sensor 2	Hall sensor 2 input
C9	Hall sensor 3	Hall sensor 3 input

Table 3-19 Hall sensor – Pin assignment



Important notice

The maximum supply current of the sensor supply voltage output V_{Sensor} is in total 145 mA. It can be used for:

- Hall sensors → Chapter “3.3.5 Sensor 1 Hall sensor” on page 3-23
- Incremental encoders → Chapter “3.3.6.1 Incremental encoder” on page 3-24
- SSI / BiSS C encoders → Chapter “3.3.6.2 SSI / BiSS C unidirectional absolute encoder” on page 3-26
- Other peripherals which need a 5 VDC supply.

All currents resulting from parts connected to the sensor supply voltage output V_{Sensor} must not exceed 145 mA in total.

Hall sensor	
Sensor supply voltage output V _{Sensor}	5 VDC
Max. Hall sensor supply current	145 mA (→ refer to Important notice)
Input voltage	0...24 VDC
Max. input voltage	24 VDC
Low-level input voltage	< 0.8 VDC
High-level input voltage	> 2.0 VDC
Internal pull-up resistor	2.7 kΩ (referenced to 5.45 VDC - 0.6 VDC)

Table 3-20 Hall sensor specification

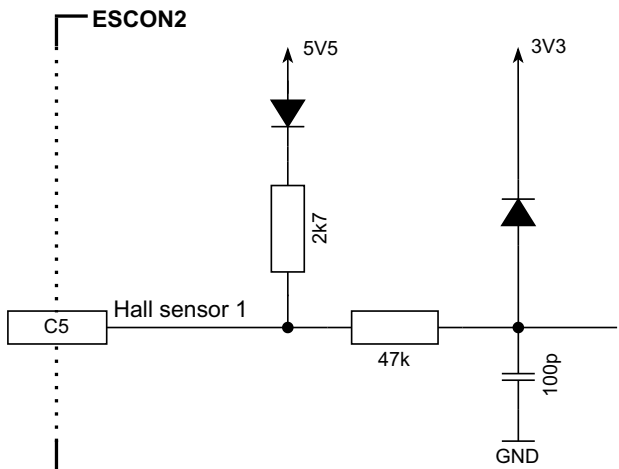


Figure 3-8 Hall sensor 1 input circuit (analogously valid for Hall sensors 2 & 3)

3.3.6 Sensor 2 Encoder / I/Os

You can connect additional sensors, either incremental encoders, serial encoders, or digital inputs and outputs. Only one sensor or function can be used at a time: either an incremental encoder, an absolute encoder, or high-speed digital I/Os.

3.3.6.1 Incremental encoder



Best practice

For best performance and resistance against electrical interference, **use encoders with a line driver (differential scheme)**. Otherwise, limitations may apply due to slow switching edges. The controller supports both differential and single-ended (unsymmetrical) schemes.

Pin	Signal	Description
C2	V_{Sensor}	Sensor supply voltage output (5 VDC / $I_L \leq 145 \text{ mA}$)
C3	GND	Ground
C4	Channel A	Digital incremental encoder channel A
C6	Channel A\	Digital incremental encoder channel A complement
C8	Channel B	Digital incremental encoder channel B
C10	Channel B\	Digital incremental encoder channel B complement

Table 3-21 Incremental encoder – Pin assignment



Important notice

The maximum supply current of the sensor supply voltage output V_{Sensor} is in total 145 mA. It can be used for:

- Hall sensors → Chapter “3.3.5 Sensor 1 Hall sensor” on page 3-23
- Incremental encoders → Chapter “3.3.6.1 Incremental encoder” on page 3-24
- SSI / BiSS C encoders → Chapter “3.3.6.2 SSI / BiSS C unidirectional absolute encoder” on page 3-26
- Other peripherals which need a 5 VDC supply.

All currents resulting from parts connected to the sensor supply voltage output V_{Sensor} must not exceed 145 mA in total.

Digital incremental encoder (differential)	
Sensor supply voltage output V_{Sensor}	5 VDC
Max. sensor supply current	$\leq 145 \text{ mA}$ (→ refer to Important notice)
Min. differential input voltage	$\pm 200 \text{ mV}$
Max. input voltage	$\pm 12 \text{ VDC}$
Line receiver (internal)	EIA/RS422 standard
Max. input frequency	6.67 MHz

Table 3-22 Differential digital incremental encoder specification

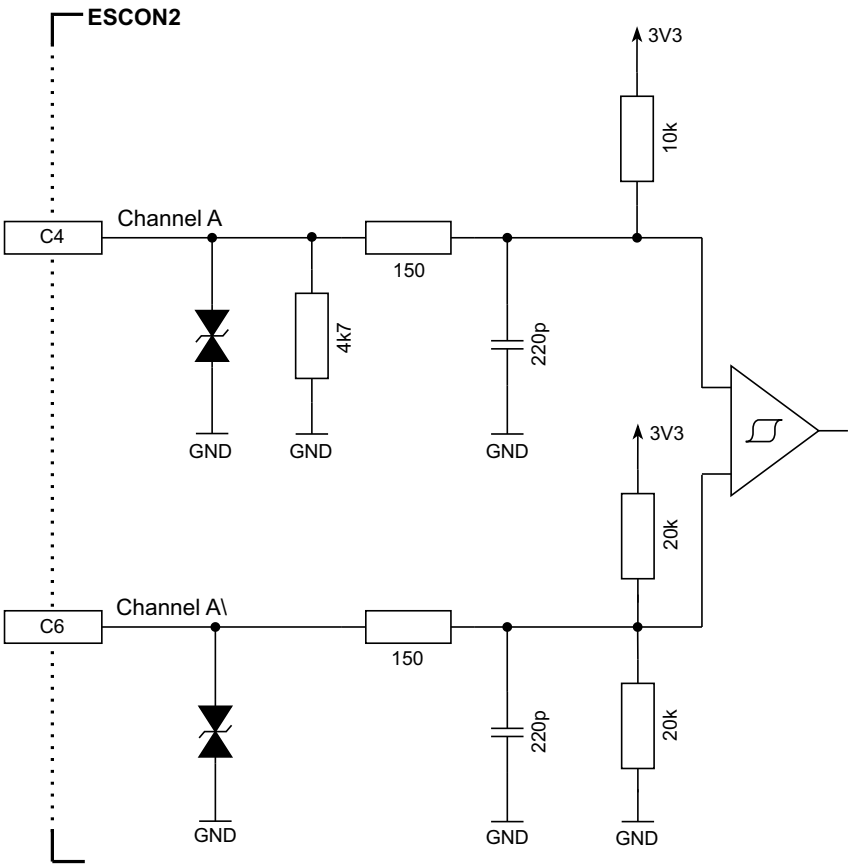


Figure 3-9 Digital incremental encoder input circuit Ch A “differential” (analogously valid for Ch B)

Digital incremental encoder (single-ended)		
Sensor supply voltage output V_{Sensor}		5 VDC
Max. sensor supply current		$\leq 145 \text{ mA}$ (→refer to Important notice)
Input voltage		0...5 VDC
Max. input voltage		$\pm 12 \text{ VDC}$
Low-level input voltage		$< 1 \text{ VDC}$
High-level input voltage		$> 2.4 \text{ VDC}$
Input high current		I_{IH} = typically 1.3 mA @ 5 VDC
Input low current		I_{IL} = typically -0.36 mA @ 0 VDC
Max. input frequency	Push-pull	6.25 MHz
	Open collector	100 kHz (required external 3k3 pull-up)

Table 3-23 Single-ended digital incremental encoder specification

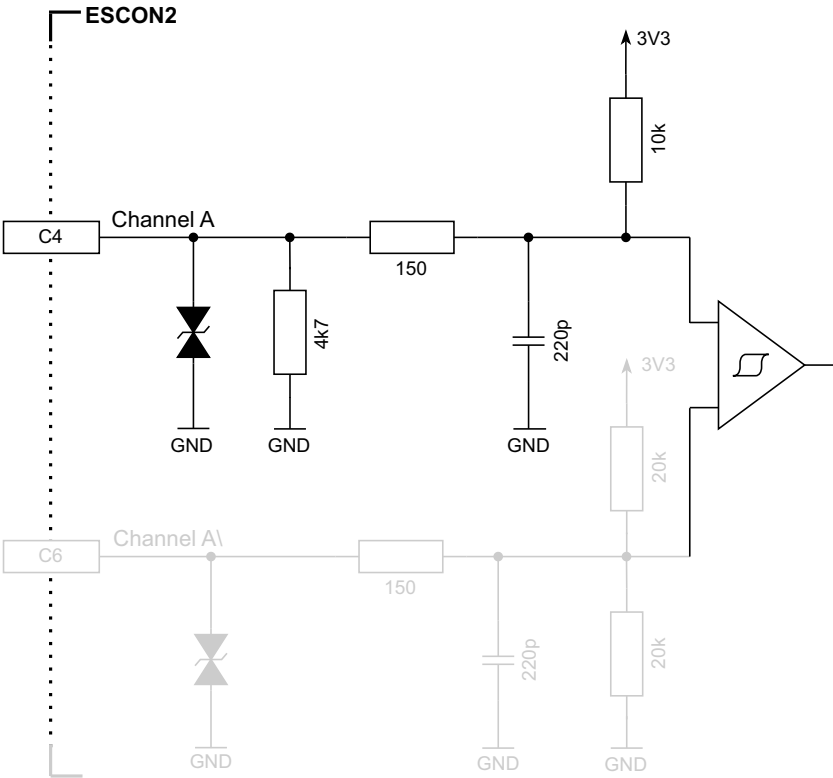


Figure 3-10 Digital incremental encoder input circuit Ch A “single-ended” (analogously valid for Ch B)

3.3.6.2 SSI / BiSS C unidirectional absolute encoder



Best practice

For cable lengths over 30 cm and for best performance and resistance against electrical interference, **use encoders with a line driver (differential scheme)**. This requires an external transceiver on the motherboard (see → Chapter “4.2.9 RS422 transceiver for differential SSI, BiSS C or high-speed I/Os signals” on page 4-50).

Pin	Signal	Description
C2	V _{Sensor}	Sensor supply voltage output (5 VDC / I _L ≤ 145 mA)
C3	GND	Ground
C12	Data	Data (SSI, BiSS C)
C17	Clock	Clock (SSI, BiSS C)

Table 3-24 SSI / BiSS C unidirectional absolute encoder – Pin assignment



Important notice

The maximum supply current of the sensor supply voltage output V_{Sensor} is in total 145 mA. It can be used for:

- Hall sensors → Chapter “3.3.5 Sensor 1 Hall sensor” on page 3-23
- Incremental encoders → Chapter “3.3.6.1 Incremental encoder” on page 3-24
- SSI / BiSS C encoders → Chapter “3.3.6.2 SSI / BiSS C unidirectional absolute encoder” on page 3-26
- Other peripherals which need a 5 VDC supply.

All currents resulting from parts connected to the sensor supply voltage output V_{Sensor} must not exceed 145 mA in total.

SSI / BiSS C unidirectional absolute encoder (single-ended)		
Sensor supply voltage output V_{Sensor}		5 VDC
Max. sensor supply current		$\leq 145 \text{ mA}$ (→refer to Important notice)
Clock frequency	SSI	0.4...2 MHz
	BiSS C	0.4...4 MHz

Table 3-25 SSI / BiSS C unidirectional absolute encoder specification

The maximum clock frequency (data rate) depends on the encoder cable length and the encoder configuration. For more information, for example configurable clock frequencies (data rates), refer to the →ESCON2 Firmware Specification [2].

SSI / BiSS C unidirectional absolute encoder data channel	
Input voltage	0...5 VDC
Max. input voltage	$\pm 12 \text{ VDC}$
Low-level input voltage	$< 1.0 \text{ VDC}$
High-level input voltage	$> 2.4 \text{ VDC}$
Input high current	I_{IH} = typically 0.34 mA @ 5 VDC (→refer to Important notice)
Input low current	I_{IL} = typically 0 mA @ 0 VDC (→refer to Important notice)
Max. input frequency	6.25 MHz
Total reaction time	$< 1.5 \text{ ms}$

Table 3-26 Single-ended SSI / BiSS C unidirectional absolute encoder data channel specification

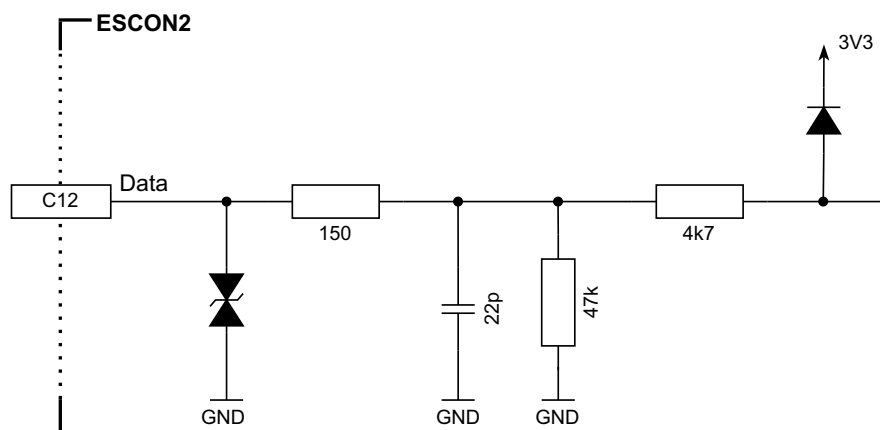


Figure 3-11 SSI absolute encoder data input (analogously valid for BiSS C)

SSI / BiSS C unidirectional absolute encoder clock channel		
Output voltage		3.3 VDC
Output resistance	Total	270 Ω (220 Ω + 50 Ω)
	Processor internal	50 Ω
Clock frequency	SSI	0.4...2 MHz
	BiSS C	0.4...4 MHz

Table 3-27 Single-ended SSI / BiSS C unidirectional absolute encoder clock channel specification

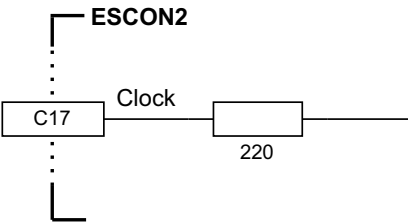


Figure 3-12 SSI absolute encoder clock output (analogously valid for BiSS C)

3.3.6.3 High-speed digital I/Os

Alternatively, the sensor interface can be used for high-speed digital I/O operation.

Pin	Signal	Description
C2	V _{Sensor}	Sensor supply voltage output (5 VDC / I _L ≤ 145 mA)
C3	GND	Ground
C4	HsDigIN1	High-speed digital input 1
C6	HsDigIN1\	High-speed digital input 1 complement
C8	HsDigIN2	High-speed digital input 2
C10	HsDigIN2\	High-speed digital input 2 complement
C12	HsDigIN4	High-speed digital input 4
C14	HsDigIN3	High-speed digital input 3
C17	HsDigOUT1	High-speed digital output 1

Table 3-28 High-speed digital I/Os – Pin assignment

High-speed digital inputs 1...2 (differential)	
Max. input voltage	± 12 VDC
Min. differential input voltage	± 200 mV
Line receiver (internal)	EIA/RS422 standard
Max. input frequency	6.67 MHz
Total reaction time	< 1.5 ms

Table 3-29 Differential high-speed digital inputs specification

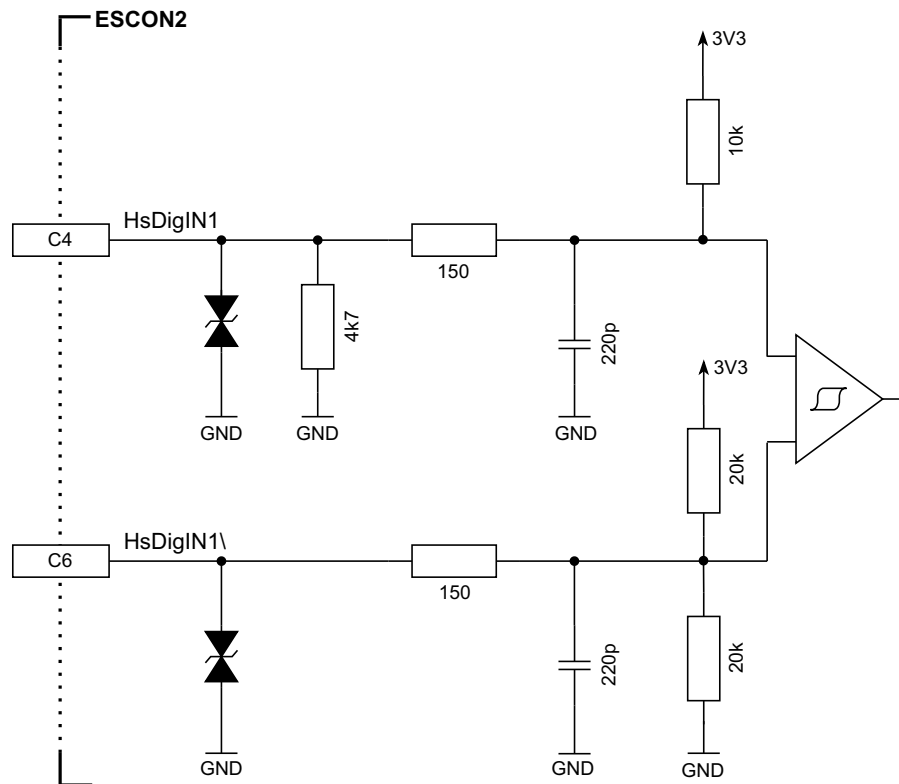


Figure 3-13 HsDigIN1 circuit “differential” (analogously valid for HsDigIN2)

High-speed digital inputs 1...4 (single-ended)		
Input voltage		0...5 VDC
Max. input voltage		± 12 VDC
Low-level input voltage		< 1.0 VDC
High-level input voltage		> 2.4 VDC
Input high current	HsDigIN1...3	I_{IH} = typically 1.3 mA @ 5 VDC
	HsDigIN4	I_{IH} = typically 0.34 mA @ 5 VDC
Input low current	HsDigIN1...3	I_{IL} = typically -0.36 mA @ 0 VDC
	HsDigIN4	I_{IL} = typically 0 mA @ 0 VDC
Max. input frequency		6.25 MHz
Total reaction time		< 1.5 ms

Table 3-30 Single-ended high-speed digital input specification

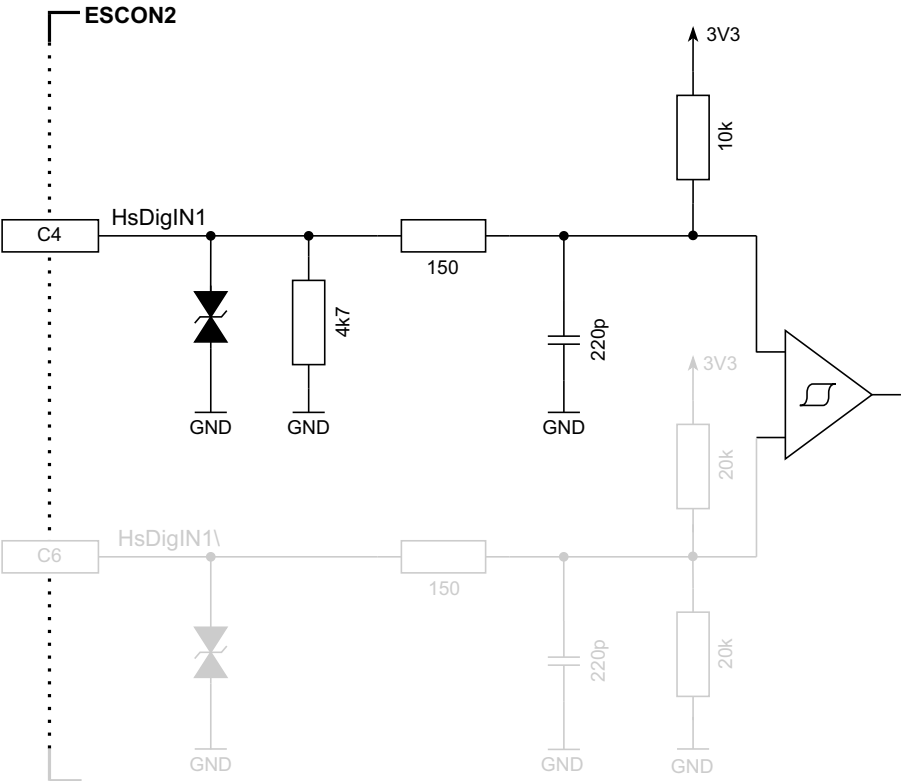


Figure 3-14 HsDigIN1 circuit “single-ended” (analogously valid for HsDigIN2...3)

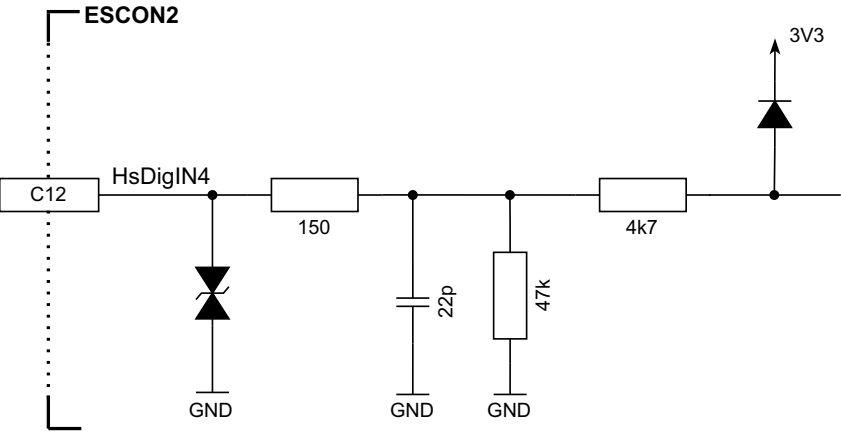


Figure 3-15 HsDigIN4 circuit “single-ended”

WIRING EXAMPLES

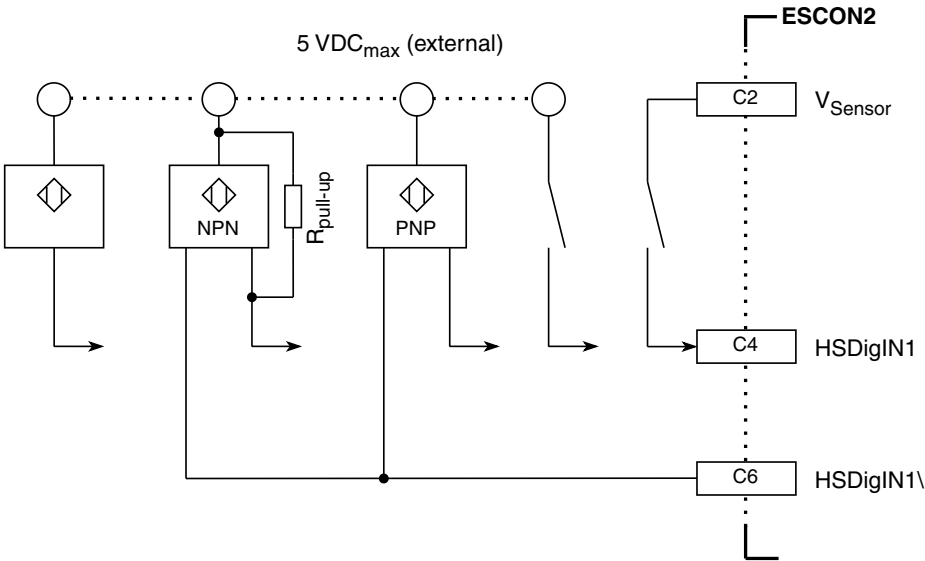


Figure 3-16 Wiring examples for proximity sensors and switches on HsDigIN1 (analogously valid for HsDigIN2)

High-speed digital output 1		
Output voltage		3.3 VDC
Output resistance	Total	270 Ω (220 Ω + 50 Ω)
	Processor internal	50 Ω
Max. output frequency		25 kHz

Table 3-31 High-speed digital output specification

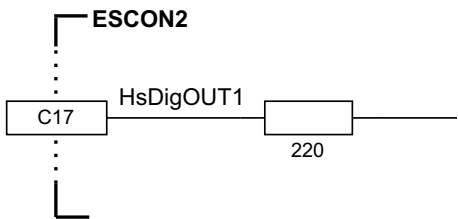


Figure 3-17 HsDigOUT1 circuit

WIRING EXAMPLES

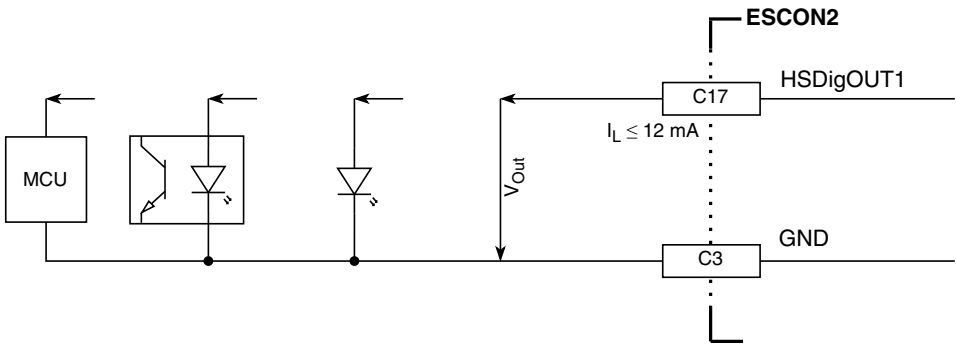


Figure 3-18 Wiring examples for "sourcing" on HsDigOUT1

3.3.7 Digital I/Os

Pin	Signal	Description
C2	V _{Sensor}	Sensor supply voltage output (5 VDC / I _L ≤ 145 mA)
C16	GND	Ground
C19	DigIN1	Digital input 1
C21	DigIN2	Digital input 2
C23	DigIN3	Digital input 3
C25	DigIN4	Digital input 4
C27	DigOUT1	Digital output 1
C29	DigOUT2	Digital output 2

Table 3-32 Digital I/Os – Pin assignment

Digital inputs 1...2	
Input voltage	0...30 VDC
Max. input voltage	±30 VDC
Low-level input voltage	< 0.8 VDC
High-level input voltage	> 2.1 VDC
Input resistance	typically 47 kΩ < 3.3 VDC typically 37 kΩ @ 5 VDC typically 25 kΩ @ 24 VDC
Input current at logic 1	typically 135 μA @ 5 VDC
Hardware switching delay	< 6 μs
Total reaction time	< 2.3 ms
PWM duty cycle (resolution)	10...90 % (0.1 %)
PWM frequency	50 Hz...10 kHz
PWM accuracy	typically +0.1 % absolute @ 50 Hz / 5 VDC typically +1.5 % absolute @ 10 kHz / 5 VDC

Table 3-33 Digital inputs 1...2 specification

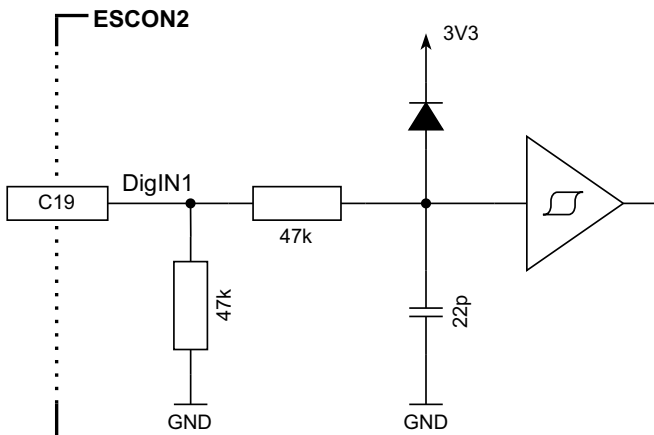


Figure 3-19 DigIN1 circuit (analogously valid for DigIN2)

Digital inputs 3...4	
Input voltage	0...30 VDC
Max. input voltage	±30 VDC
Low-level input voltage	< 0.8 VDC
High-level input voltage	> 2.1 VDC
Input resistance	typically 47 kΩ < 3.3 VDC typically 37 kΩ @ 5 VDC typically 25 kΩ @ 24 VDC
Input current at logic 1	typically 135 μA @ 5 VDC
Hardware switching delay	< 300 μs
Total reaction time	< 2.3 ms

Table 3-34 Digital inputs 3...4 specification

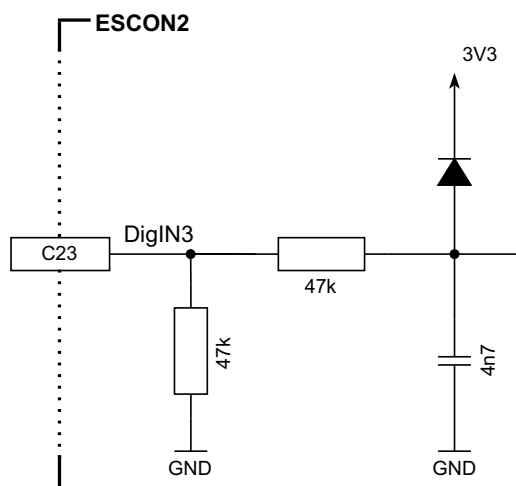


Figure 3-20 DigIN3 circuit (analogously valid for DigIN4)

WIRING EXAMPLES

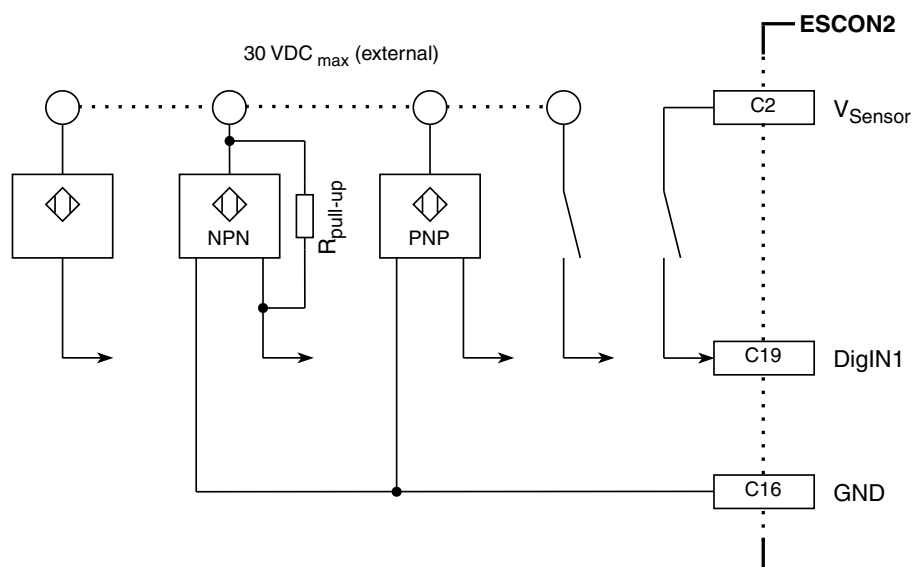


Figure 3-21 Wiring examples for proximity sensors and switches on DigIN1 (analogously valid for DigIN2...4)

Digital outputs 1...2		
Output voltage		3.3 VDC
Output resistance	Total	270 Ω (220 Ω + 50 Ω)
	Processor internal	50 Ω
Max. output frequency		25 kHz

Table 3-35 Digital output specification

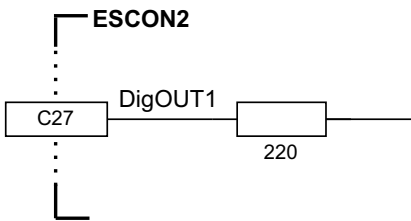


Figure 3-22 DigOUT1 circuit (analogously valid for DigOUT2)

For connecting devices that require a larger output current, use an external load switch on the motherbaord (see →Chapter “4.2.10 Digital outputs load switch” on page 4-50).

WIRING EXAMPLES

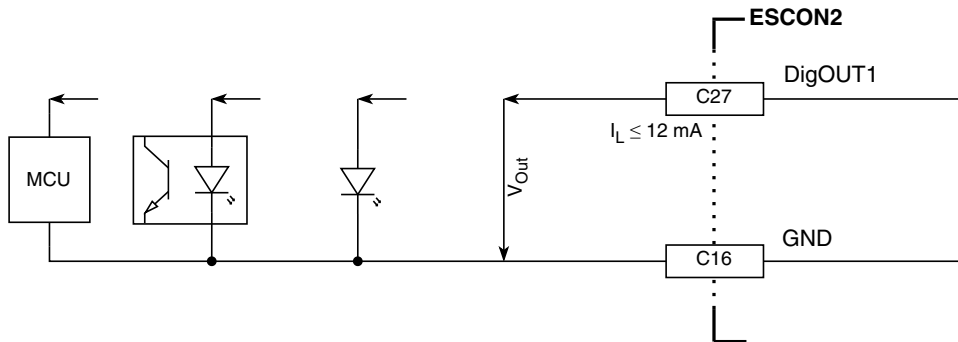


Figure 3-23 Wiring examples for "sourcing" on DigOUT1 (analogously valid for DigOUT2)

3.3.8 Analog I/Os

Pin	Signal	Description
C2	V _{Sensor}	Sensor supply voltage output (5 VDC / I _L ≤ 145 mA)
C16	GND	Ground
C18	AnIN1+	Analog input 1, positive signal
C20	AnIN1-	Analog input 1, negative signal
C22	AnIN2+	Analog input 2, positive signal
C24	AnIN2-	Analog input 2, negative signal
C26	AnOUT1	Analog output 1
C28	AnOUT2	Analog output 2
C30	MotorTemp	Motor temperature sensor input

Table 3-36 Analog I/O – Pin assignment

Analog inputs 1...2		
Input voltage		±10 VDC (differential)
Max. input voltage		±24 VDC
Common mode voltage		−5...+10 VDC (referenced to GND)
Input resistance	differential	80 kΩ
	referenced to GND	65 kΩ
A/D converter		12-bit
Resolution		5.64 mV
Bandwidth		10 kHz

Table 3-37 Analog input specification

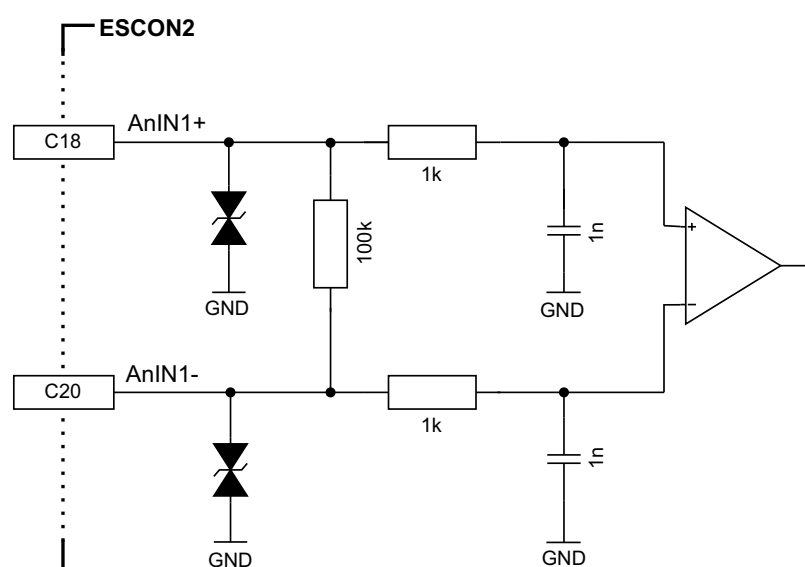


Figure 3-24 AnIN1 circuit (analogously valid for AnIN2)

WIRING EXAMPLES

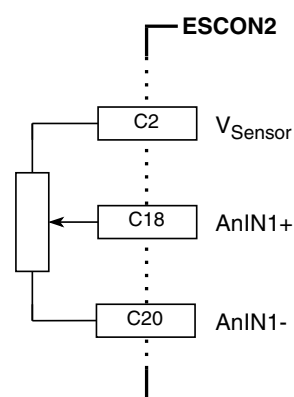


Figure 3-25 Wiring examples for a potentiometer on AnIN1 (analogously valid for AnIN2)

The figure above shows how to connect an external potentiometer to the analog input. It is recommended to use a potentiometer that has a resistance of 10 kΩ or more to reduce the load on the voltage output.

Analog outputs 1...2	
Output voltage	±4 VDC
D/A converter	12-bit
Resolution	2.42 mV
Refresh rate	50 kHz
Analog bandwidth of output amplifier	25 kHz
Max. capacitive load	300 nF Note: The increase rate is limited in proportion to the capacitive load (e.g. 5 V/ms @ 300 nF)
Max. output current limit	1 mA

Table 3-38 Analog output specification

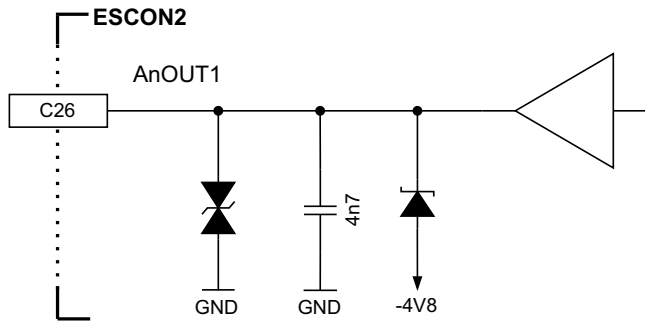


Figure 3-26 AnOUT1 circuit (analogously valid for AnOUT2)

3.3.9 Serial Communication Interface (SCI) / RS232

The SCI is a two-wire asynchronous serial port, commonly known as a UART. It supports digital communication between the CPU and other asynchronous peripherals that use the standard non-return-to-zero (NRZ) format. A common use of the SCI is to build an RS232 interface by wiring it to an RS232 transceiver.



- Bit rate setting**
- Consider the master's maximal bit rate.
 - The standard bit rate setting (factory setting) is 115'200 bit/s.

Pin	Signal	Description
C48	DSP_TxD	Serial communication interface transmit (UART)
C50	DSP_RxD	Serial communication interface receive (UART)

Table 3-39 SCI – Pin assignment

Serial Communication Interface (SCI)		
Input voltage		0...3.3 VDC
Max. input voltage		5 VDC
High-level input voltage		> 1.8 VDC
Low-level input voltage		< 1 VDC
High-level output voltage		> 2.4 VDC
Low-level output voltage		< 0.4 VDC
Series resistance transmit	Total	270 Ω (220 Ω + 50 Ω)
	Processor internal	50 Ω
Max. bit rate		115'200 bit/s
Data format		NRZ (non-return-to-zero)

Table 3-40 SCI specification

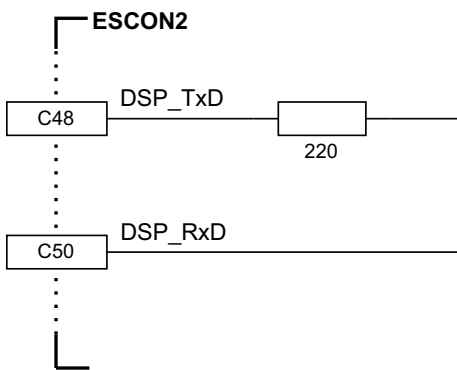


Figure 3-27 SCI circuit

3.3.10 CAN

3.3.10.1 Interface

The ESCON2 is specially designed to be commanded and controlled via a Controller Area Network (CAN), a highly efficient data bus common in all fields of automation and motion control. It is preferably used as a slave node in the CANopen network.

Pin	Signal	Description
C45	GND	Ground
C47	CAN high	CAN bus high line
C49	CAN low	CAN bus low line

Table 3-41 CAN – Pin assignment

CAN interface	
Standard	ISO 11898-2:2003
Max. bit rate	1 Mbit/s
Max. number of CAN nodes	63/127 (via hardware/software setting)
Protocol	CiA 301 version 4.2.0
Node-ID setting	By external wiring or software

Table 3-42 CAN interface specification



Note

- Consider the CAN master's maximal bit rate.
- The standard bit rate setting (factory setting) is 1 Mbit/s.
- Use 120 Ω termination resistor at both ends of the CAN bus.
- For detailed CAN information see separate document → ESCON2 Communication Guide [1].

3.3.10.2 Configuration

The device's identification (ID) can be set by hardware (external wiring) or software using binary code:

Pin	Signal	Description	Binary Code	Valence
C31	Auto bit rate	Automatic bit rate detection of CAN bus	-	-
C33	ID 1	CAN ID 1	2^0	1
C35	ID 2	CAN ID 2	2^1	2
C37	ID 3	CAN ID 3	2^2	4
C39	ID 4	CAN ID 4	2^3	8
C40	GND	Ground	-	-
C41	ID 5	CAN ID 5	2^4	16
C43	ID 6	CAN ID 6	2^5	32
C45	GND	Ground	-	-

Table 3-43 CAN Auto bit rate / ID – Pin assignment

CAN ID	
Logic 1	connected to GND
Logic 0	not connected

Table 3-44 CAN ID specification

The set ID can be calculated by adding the valences of all inputs connected externally to GND. Use the following table as a (non-concluding) guide:

CAN ID						ID
1	2	3	4	5	6	
0	0	0	0	0	0	–
1	0	0	0	0	0	1
0	1	0	0	0	0	2
0	0	1	0	0	0	4
1	0	1	0	0	0	5
0	0	0	1	0	0	8
0	0	0	0	1	0	16
0	0	0	0	0	1	32
1	1	1	1	1	1	63
0 = ID input line not connected 1 = ID input line externally connected to GND						

Table 3-45 ID – Examples

SETTING THE ID BY MEANS OF «MOTION STUDIO»

- The ID may be set by software (changing object 0x2000 «Node-ID», range 1...127).
- The ID set by software is valid if the ID is set to "0" (none of the ID input lines connected).

CAN AUTOMATIC BIT RATE DETECTION

With this function, the CANopen interface can be put in a "listen only" mode. For further details see separate document ➔ESCON2 Firmware Specification [2]. Automatic bit rate detection is activated when the input line is externally connected to GND.

Bit rate detection	
Logic 1	connected to GND
Logic 0	not connected

Table 3-46 Bit rate detection specification

3.3.11 USB



USB potential differences may cause hardware damage

High potential differences of the two power supplies of controller and PC/Notebook can lead to damaged hardware.

- Avoid potential differences between the power supply of controller and PC/Notebook or, if possible, balance them.
- Always establish physical USB connection first before switching on the power supply of the controller.
- It is recommended to use a galvanic isolator to avoid potential differences.

With a galvanic isolator, you can also connect the USB while the system is powered (hot-plugging).

One suitable device is the USB Isolator 33204 from Wiesemann & Theis GmbH.

Pin	PC's USB Ter- minal	Signal	Description
C42	1	V _{BUS}	USB supply voltage input 5 VDC
C44	3	USB_D+	USB Data+ (twisted pair with USB Data-)
C45	4	GND	USB Ground
C46	2	USB_D-	USB Data- (twisted pair with USB Data+)

Table 3-47 USB – Pin assignment

USB	
Data signaling rate	12 Mbit/s (Full speed)
Max. bus supply voltage V _{BUS}	5.25 VDC
Max. DC data input voltage	-0.3...+3.8 VDC

Table 3-48 USB interface specification

3.3.12 Motor temperature sensor (future release)

The functionality will only be available with a future firmware release.

Pin	Signal	Description
C30	MotorTemp	Motor temperature sensor input
C40	GND	Ground

Table 3-49 Motor temperature sensor – Pin assignment

Motor temperature sensor input	
Input voltage	0...3.3 VDC
Max. input voltage	+24 VDC
A/D converter	12-bit
Internal pull-up resistor	3.3 kΩ (referenced to 3.3 VDC)

Table 3-50 Motor temperature sensor – specifications

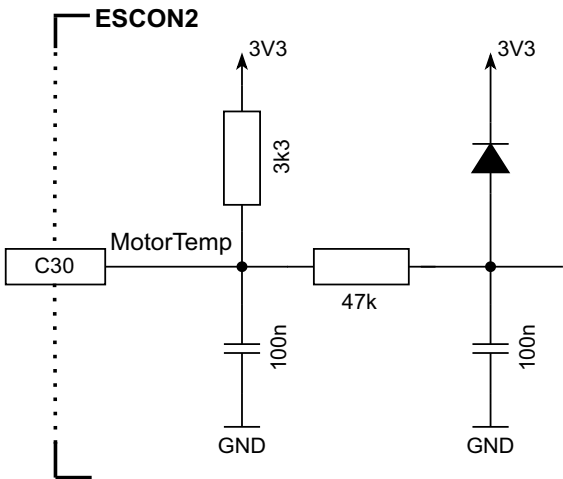


Figure 3-28 Motor temperature circuit

3.4 Status indicators

The ESCON2 Module 60/30 provides two output signals to display the actual operation status and possible warnings and errors using LEDs. A set of green and red LEDs is recommended:

- Green LED shows the operation status
- Red LED indicates warnings and errors

LED		Warning / Error	Description
Green	Red		
Slow	OFF	No warning/error active.	Power stage is disabled. The ESCON2 is in status • Switch on disabled • Ready to switch on • Switched on
Slow	Slow	At least one warning is active.	
ON	OFF	No warning/error active.	Power stage is enabled. The ESCON2 is in status • Operation enabled • Quick stop active
ON	Slow	At least one warning is active.	
ON	ON	At least one error has occurred.	Power stage is enabled. The ESCON2 is in temporary status • Fault reaction active
OFF	ON	At least one error has occurred.	Power stage is disabled. The ESCON2 is in status • Fault
Flash	ON	n/a	Firmware update in progress or invalid application
Slow = LED is slowly blinking (0.5 s OFF, 0.5 s ON) Flash = LED is flashing (0.9 s OFF, 0.1 s ON)			

Table 3-51 Device Status LEDs

Pin	Signal	Description
C11	LED red	LED red (warning/error) signal
C13	LED green	LED green (operation) signal

Table 3-52 Device status outputs - Pin assignment

Device status outputs	
Output voltage	3.3 VDC
Output resistance	50 Ω
Max. load current	5 mA

Table 3-53 Device status output specification

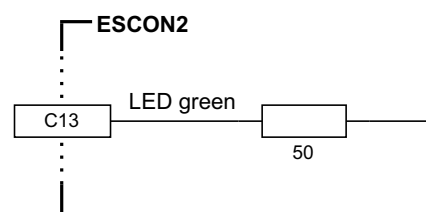


Figure 3-29 LED green circuit (analogously valid for LED red)

••page intentionally left blank••

4 MOTHERBOARD DESIGN GUIDE

This chapter gives information about how to integrate the Module into a printed circuit board (PCB). It gives requirements for the PCB layout and external components. It also gives pin assignments and connection examples.

The ESCON2 Module 60/30 Motherboard HDK →[4] contains an Altium reference design. Use this reference design as an example. The requirements in this document apply. You can use the ESCON2 CB 60/30 instead of a customer-specific motherboard. Refer to Section →4.1.



CAUTION

Dangerous Action

Errors in implementing the design can result in serious injury!

- *Designing a printed circuit board requires special skills and knowledge and may only be performed by electronic developers!*
- *This quick guide is only intended as an aid. It does not claim to be complete and will not automatically result in a functional component.*



Unused interfaces

If you do not use an interface, you may still need to connect the signals on the motherboard. For example, this can help prevent electrical noise. Read all sections of the motherboard design guide.



Get help

If you are not trained in the design and development of printed circuit boards, you will need additional support. maxon will be happy to provide you with a quote for designing and manufacturing a motherboard for your specific application.

4.1 Connection accessory - ready-to-use connector board

The ESCON2 CB 60/30 (P/N 783729) is a ready-to-use connector board provided by maxon, specifically designed for seamless integration with the Module. This connector board features industrial connectors compatible with maxon prefab cables. Together with the thermal accessories → see Chapter “2.2.4 Thermal accessories” on page 2-12, it forms the ready-to-connect version ESCON2 Compact 60/30 (P/N 783734). For more information, refer to the →maxon: ESCON2 Compact 60/30 Hardware Reference [3].

The guidelines of the following chapters are based on the design of the CB.

For more Information to design a motherboard, refer to Chapter →4 Motherboard design guide and see the →maxon: ESCON2 Module 60/30 motherboard HDK (Altium Reference Design) [4].

4.2 Requirements for components of third-party suppliers



Best practice

For references and recommended components consult →Table 4-54.

4.2.1 Terminal headers

To implement a motherboard for the Module, three terminal headers are required.

4.2.2 Power supply voltage

To protect the Module, it is recommended to use an external circuit breaker, a TVS diode, and a capacitor in the voltage supply circuit.

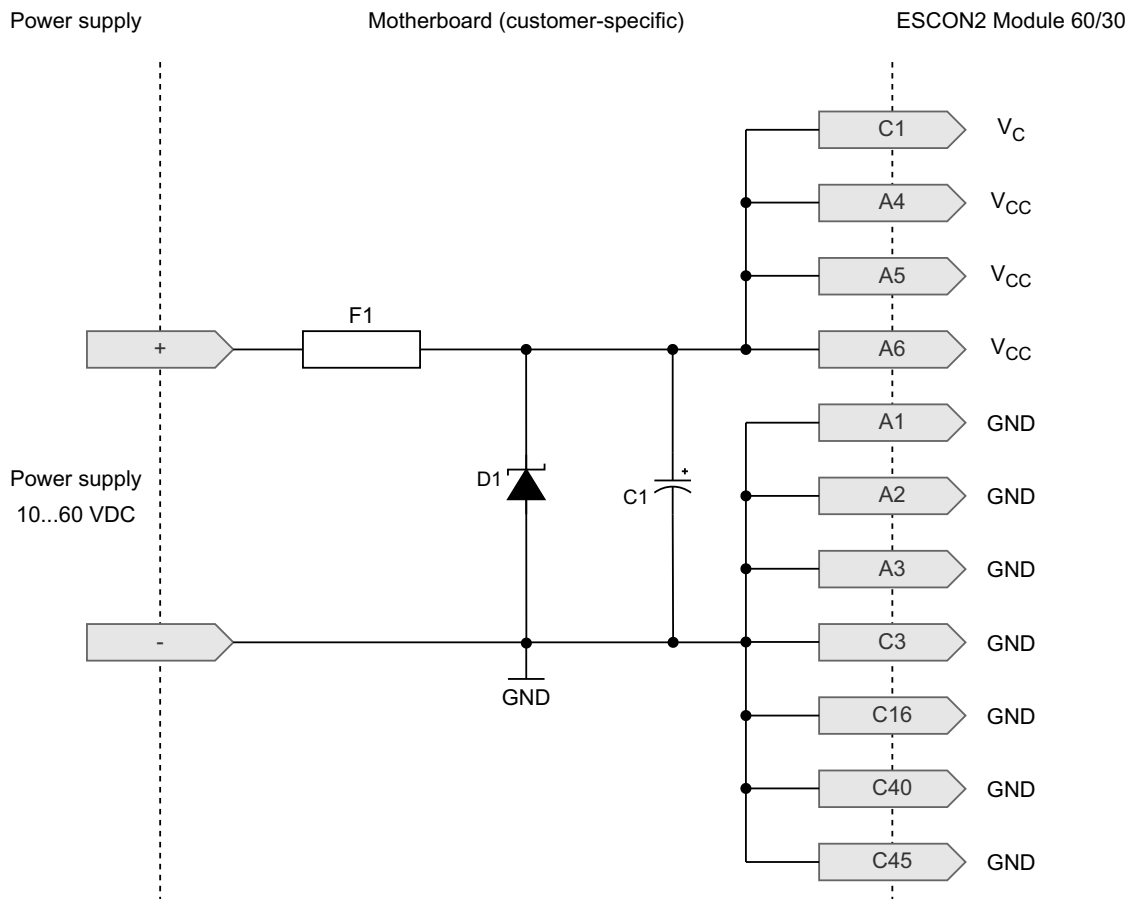


Figure 4-30 Wiring of power supply

Input Fuse (F1)

An input fuse (F1) is necessary in order to provide reverse polarity protection. Together with an unipolar TVS diode (D1), this prevents current from flowing in the wrong direction.

Capacitor (C1)

The function of the Module does not necessarily require the use of an external capacitor. However, to further reduce voltage ripple or buffer feedback currents (typically present during motor deceleration), an electrolytic capacitor (C1) can be connected to the voltage supply line. Using an electrolytic capacitor is also recommended to avoid oscillations caused by supply cable inductance or the Module's built-in capacitors, which could lead to a voltage overshoot at power plug-in.

TVS Diode (D1)

To protect against overvoltage resulting from voltage transients (short voltage spikes), we recommend connecting a TVS (transient voltage suppressor) diode (D1) to the voltage supply line.

4.2.3 Logic supply voltage

The Module features a logic supply voltage input with a voltage range of 10...60 VDC. This voltage must be sourced either separately or from the power supply voltage. The following figure provides an example of a separate logic supply.

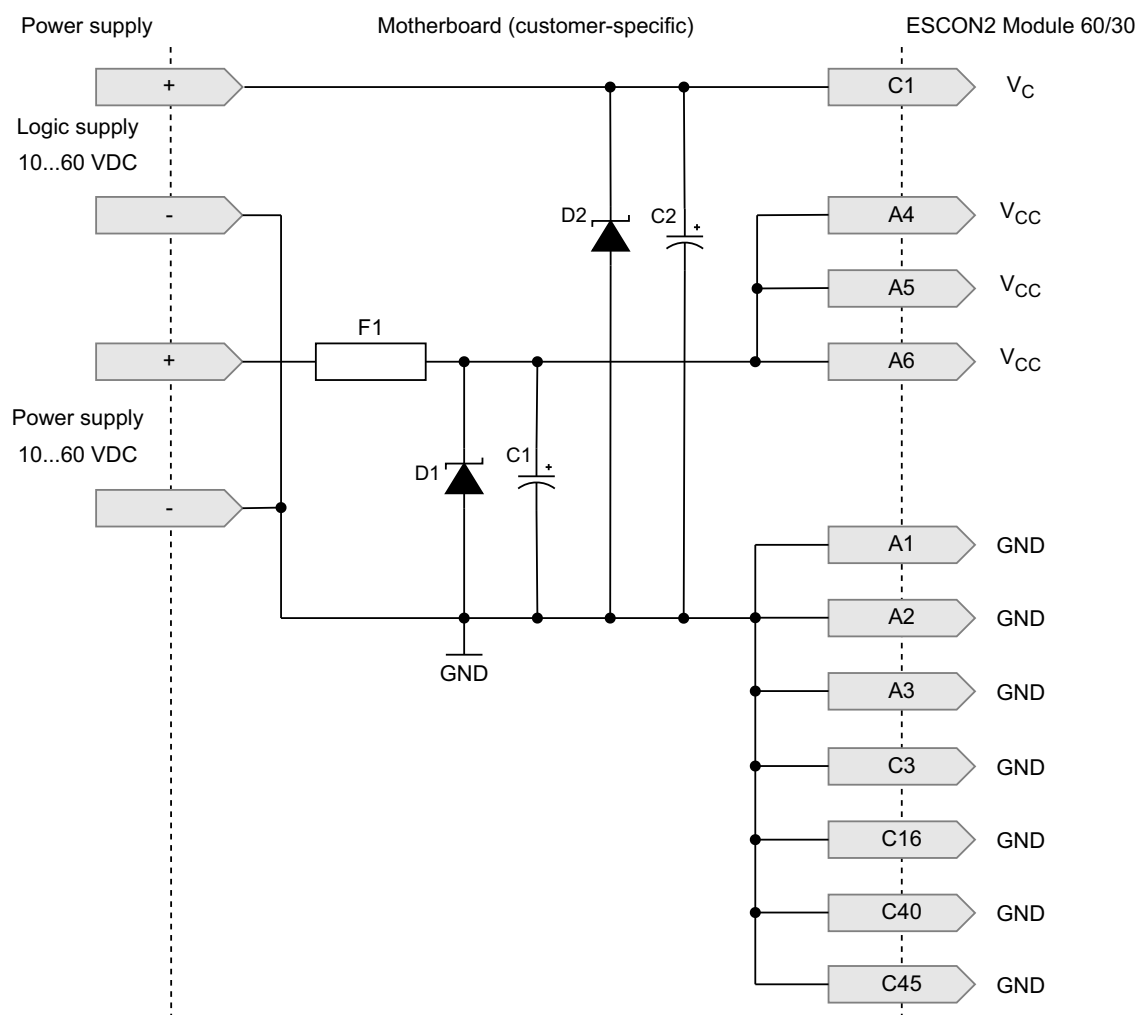


Figure 4-31 Wiring of logic supply

Capacitor (C2)

If the logic supply is sourced separately, use an electrolytic capacitor (C2). This will avoid oscillations caused by supply cable inductance or the Modules's built-in capacitors, which could lead to a voltage overshoot at power plug-in.

TVS Diode (D2)

If the logic supply voltage is sourced separately, connect a TVS (transient voltage suppressor) diode (D2) at the logic supply voltage input to protect the Module against overvoltage resulting from voltage transients (short voltage spikes).

4.2.4 Motor chokes

The Module is not equipped with internal motor chokes.

Most motors and applications do not require additional chokes. However, in cases of high supply voltage with very low terminal inductance, the ripple of the motor current can reach an unacceptably high value. This can cause the motor to heat up unnecessarily and result in unstable control behavior. The minimum terminal inductance required per phase can be calculated using the following formula:

$$L_{Phase} \geq \frac{1}{2} \cdot \left(\frac{V_{CC}}{6 \cdot f_{PWM} \cdot I_N} - (0.3 \cdot L_{Motor}) \right)$$

$L_{Phase}[H]$	Additional external inductance per phase
$V_{CC}[V]$	Operating voltage V_{CC}
$f_{PWM}[Hz]$	Switching frequency of the power stage = 50'000 Hz
$I_N[A]$	Nominal current of the motor (→ line 6 in the maxon catalog)
$L_{Motor}[H]$	Terminal inductance of the motor (→ line 11 in the maxon catalog)

If the result of the calculation is negative, no additional chokes are necessary. However, using chokes with additional filter components can be beneficial for reducing electromagnetic interference emissions.

An additional choke must have electromagnetic shielding, an adequate saturation current, minimal losses, and a nominal current greater than the motor's continuous current. The wiring example below refers to an additional inductance of 470 nH. If a different inductance is required, the filter components must also be adjusted accordingly. For further help with filter design, contact maxon Support at → <http://support.maxongroup.com>.

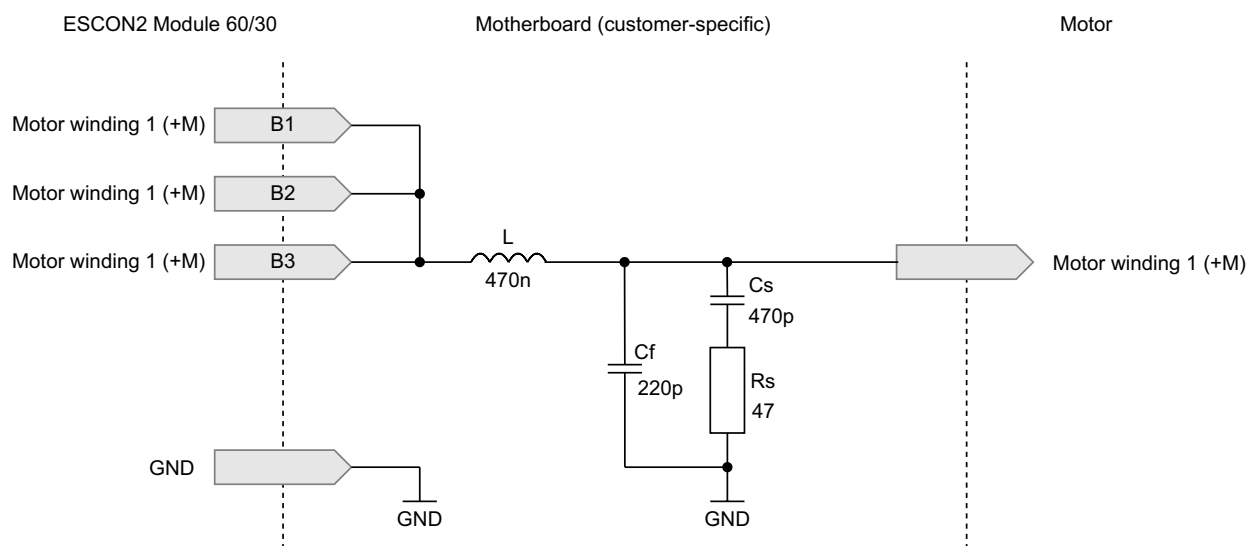


Figure 4-32 Wiring of motor winding 1 (analogously valid for motor winding 2 & 3)

4.2.5 USB interface

Use of an USB-C connector is recommended. If the USB interface is used, integrate TVS diodes for protection against overvoltage transients.

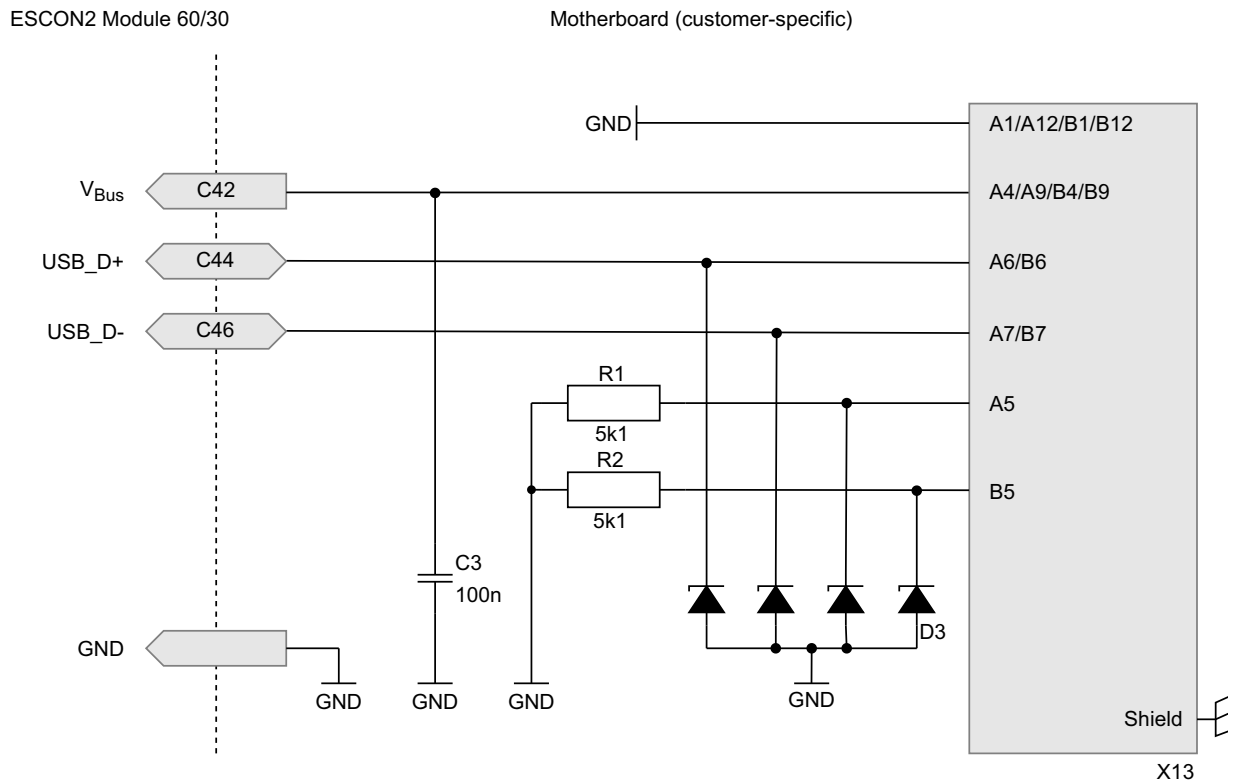


Figure 4-33 Wiring of USB-C connector

4.2.6 CAN interface

You must install a bus termination at both ends of the bus line.

The device's CAN ID (Node-ID) and automatic bit rate detection can be configured by hardware. To configure a given ID, connect CAN ID 1 through CAN ID 6 to GND as applicable (see → Chapter “3.3.10.2 Configuration” on page 3-38). To activate automatic bit rate detection, connect (C31) Auto bit rate to GND.

Alternatively, software settings can be used to adjust the parameters if the pins for automatic bit rate detection and CAN IDs are left open. If necessary, link (C47) CAN high and (C49) CAN low to a 120 Ω bus termination resistor.

The following example shows a wiring with CAN ID = 18, automatic bit rate detection activated and a 120 Ω bus termination resistor.

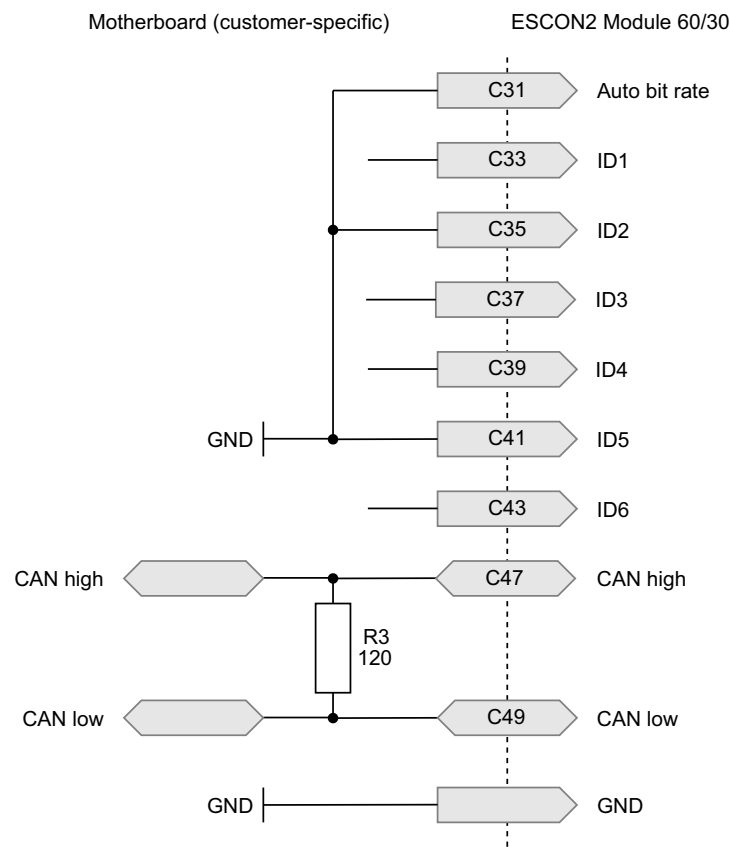


Figure 4-34 Wiring of CAN interface

If the CAN settings need to be variable, a DIP switch could be used, instead of fixed connections.

4.2.7.1 Serial Communication Interface (SCI) not used

The diagram shows a circuit for the ESCON2 Module 60/30. A capacitor labeled C12 with a value of 100n is connected between a signal line and ground (GND). The signal line is connected to a component labeled C50, which is identified as DSP_RxD. Another connection shows a signal line from a component labeled GND connected to a component labeled GND.

Figure 4-35 Wiring of Serial Communication Interface (SCI) not used

To use the serial communication interface with an external RS232 master, an additional RS232 transceiver (line driver/receiver) is necessary on the motherboard. For board-level operation, the serial interface can be used for direct connection.

Figure 4-36 Wiring of RS232 Interface



If the Serial Communication Interface (SCI) is not used and no transceiver is connected, connect the DSP_RxD signal to a 100 nF capacitor. Connect the capacitor to ground (GND). This connection helps to avoid interference.

4.2.9 RS422 transceiver for differential SSI, BiSS C or high-speed I/Os signals

An external RS422 transceiver (line driver/receiver) is required for cable lengths over 30 cm or to utilize the SSI / BiSS C unidirectional absolute encoder or high-speed digital I/Os with differential signals. In the wiring example below, the TVS diodes act as safeguards against overvoltage transients.

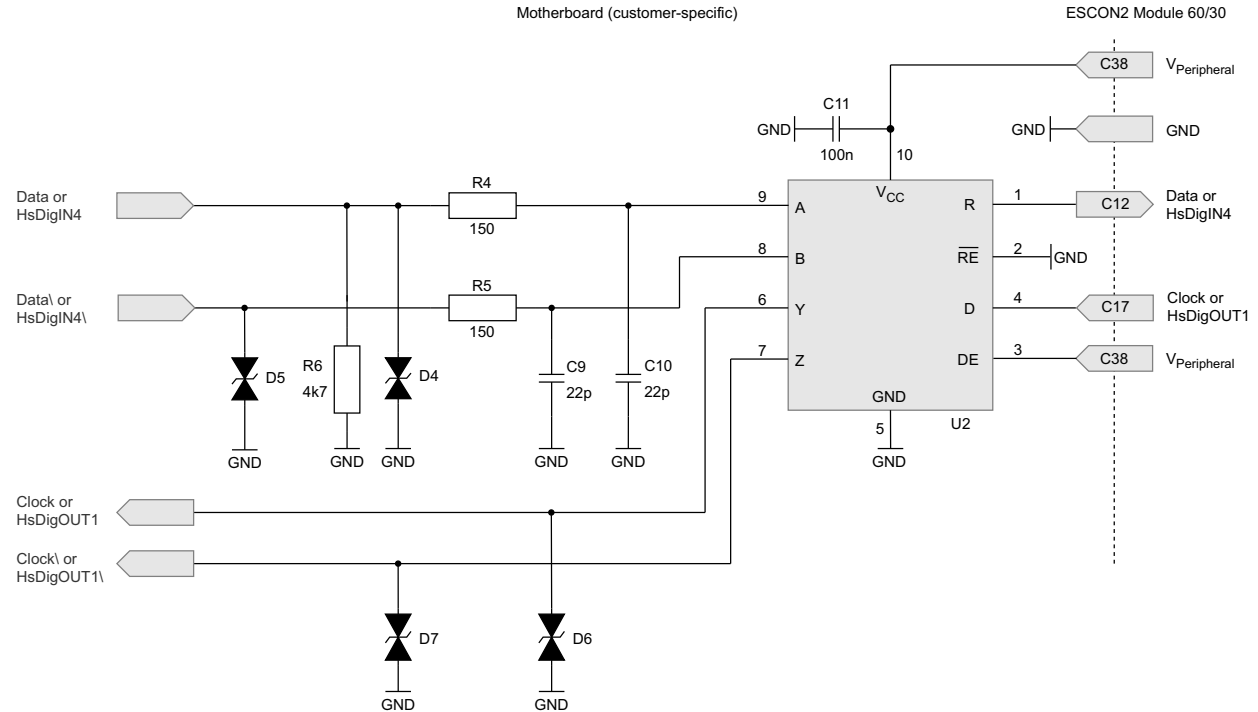


Figure 4-37 Wiring of RS422 transceiver

4.2.10 Digital outputs load switch

The digital outputs can be equipped with a load switch to connect devices requiring a larger output current. In the given circuitry example, the external load must be supplied with a maximum voltage of 36 VDC, and the load current (I_L) must not exceed 500 mA. This circuitry is not necessary if the digital output signals are only used for signal processing.

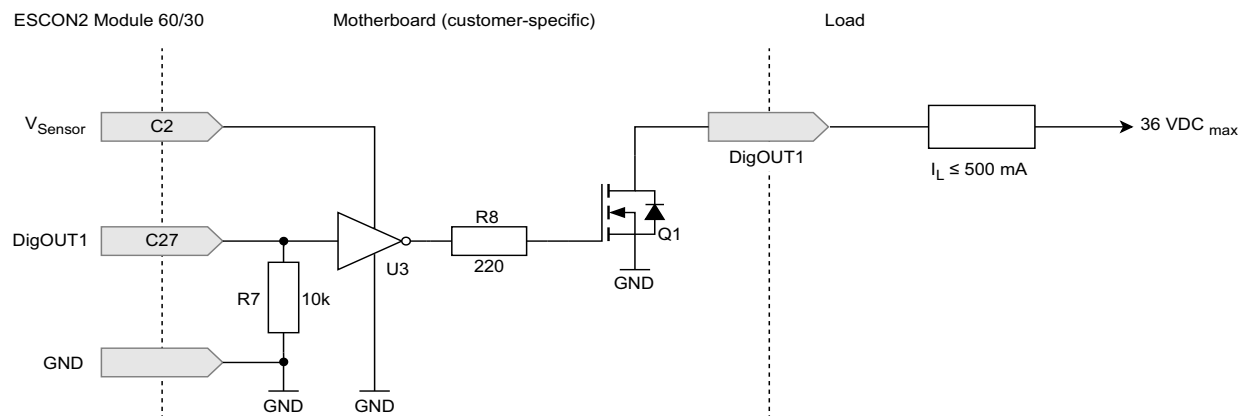


Figure 4-38 Wiring of digital output 1 load switch (analogously valid for digital output 2)



Freewheeling diode for inductive loads

When utilizing the digital output load switch for the operation of inductive loads, such as relays, it is essential to confirm the presence of a freewheeling diode to prevent potential harm to the hardware. If possible, install the freewheeling diode at the load.

4.2.11 LEDs for device status indication

A set of green and red LEDs can be integrated on the motherboard to indicate the device status. The green LED should be used for the operation status, and the red LED should be used for indicating warnings and errors. For further information, refer to ➔Chapter “3.4 Status indicators” on page 3-41.

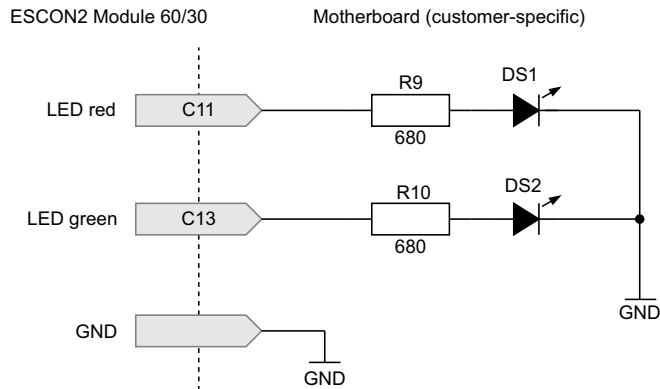


Figure 4-39 Wiring of LEDs for device status indication

4.2.12 Recommended components and manufacturers

For more information about motherboard design, refer to Chapter →4 Motherboard design guide and the →maxon: ESCON2 Module 60/30 motherboard HDK (Altium Reference Design) [4].

Recommended components	
Header	
Terminal header	6 poles: • Samtec UMPT-06-07.5-L-V-S-W-TR • Samtec UMPT-06-07.5-S-V-S-W-TR 10 poles: • Samtec UMPT-10-07.5-L-V-S-W-TR • Samtec UMPT-10-07.5-S-V-S-W-TR 2×25 poles: • Samtec ERM8-025-08.0-L-DV-TR • Samtec ERM8-025-08.0-S-DV-TR
Power supply voltage	
Fuse (F1)	40 A, 1'000 A²s • Bel Fuse 0678H9400-02 • Bourns SF-3812F4000T-2
Capacitor (C1)	The ripple current load for C1 depends on the motor's operating point and the power supply output capacity. Under worst-case conditions, the ripple current may reach $I_{\text{cont}} / 2$. Use capacitors with a rated voltage ≥ 80 VDC and adequate ripple current to avoid overheating or reducing the lifetime of the capacitors. Remark: If there is an excessive amount of reversed energy (e.g., during deceleration of loads with high inertia or during downward vertical movement), you may need to add an additional capacitor with much higher capacity (e.g., up to 10,000...47,000 μF) and/or a brake chopper, such as the maxon DSR 70/30 (P/N 235811). Example for C1 worst-case dimensioning: $I_{\text{cont}} = 30 \text{ A}$, $I_{\text{cont}} / 2 = 15 \text{ A} \rightarrow 10 \times \text{capacitor with } 22 \mu\text{F}, 80 \text{ VDC}, 1'550 \text{ mA RMS}$ • Panasonic EEHZA1K220P • Vishay MAL218297701E3 • UCC HHXB800ARA220MHA0G Choosing capacitors where the rated ripple current is higher than required will improve the components lifetime.
TVS diode (D1)	V_R 60 VDC, V_C 96.8 VDC • SMAJ60A
Logic supply voltage	
Capacitor (C2)	To avoid voltage overshoot at power plug-in with a separately sourced logic supply, use an electrolytic capacitor covering the following requirements: 33 μF or 47 μF, 80 VDC, at least 265 mA RMS • Panasonic EEHZA1K330P • Panasonic EEHZA1K470P
TVS diode (D2)	V_R 60 VDC, V_C 96.8 VDC • SMAJ60A

Continued on next page.

Recommended components	
Motor filter	
Motor choke (L)	470 nH, rated current $I_{RMS} \geq I_{cont} / I_{sat} \geq I_{peak}$, construction shielded - Bourns SRP1245A-R47M - Vishay IHLP5050EZERR47M01 - Pulse PA4346.471ANLT
Filter capacitor (C_F)	220 pF, 100 VDC
Snubber resistor (R_S)	47 Ω, 1 %, 0.250 W
Snubber capacitor (C_S)	470 pF, 100 VDC
USB interface	
USB connector (X13)	USB Type C, vertical - ASSMANN WSW AUSB1-DFN-HSR4 - Global Connector Technology USB4115-03-C - Würth Elektronik 632722110112
Resistor (R1, R2)	5.1 kΩ, 1 %, 0.0625 W
Capacitor (C3)	100 nF, 50 VDC
TVS diode (D3)	Quadruple ESD protection diode, V_R 5 VDC, V_C 10 VDC - Nexperia PESD5V0L4UG - onsemi NSQA6V8AW5T2G - Toshiba DF5A6.8LFU
CAN interface	
Resistor (R3)	120 Ω, 1 %, 0.125 W
Serial Communication Interface (SCI) not used	
Capacitor (C12)	100 nF, 16 VDC
RS232 interface	
Transceiver (U1)	Dual line driver and receiver with ESD protection - Texas Instruments MAX202IPW - ST Microelectronics ST202EBTR
Capacitor (C4...C8)	100 nF, 16 VDC
Differential absolute encoder or high-speed I/O signals	
Transceiver (U2)	Full-duplex line driver and receiver with ESD protection - Texas Instruments THVD1452DGSR - Texas Instruments SN65HVD76DGSR - Texas Instruments SN65HVD1476DGSR
Resistor (R4, R5)	150 Ω, 1 %, 0.0625 W
Resistor (R6)	4.7 kΩ, 1 %, 0.0625 W
Capacitor (C9, C10)	22 pF, 50 VDC
Capacitor (C11)	100 nF, 16 VDC
TVS diode (D4...D7)	ESD protection diode, V_R 12 VDC, V_C 22 VDC - Comchip CPDQC12VE-HF - Diodes D12V0L1B2LP-7B - Littelfuse SPHV12-01ETG-C

Continued on next page.

Recommended components		
Digital outputs load switch		
Inverter (U3)	Inverter gate • Diodes74AHCT1G04SE-7 • Nexperia74AHCT1G04GW • Texas InstrumentsSN74AHCT1G04DCKR	
Transistor (Q1)	Fully autoprotected power MOSFET (dual) • STMicroelectronicsVNS1NV04DPTR-E	
Resistor (R7)	10 kΩ, 1 %, 0.0625 W	
Resistor (R8)	220 Ω, 1 %, 0.0625 W	
LEDs for device status indication		
Resistor (R9, R10)	680 Ω, 1 %, 0.0625 W	
LED (DS1)	LED red • Dialight599-0010-007F • VishayTLMS1100-GS15 • ROHMSML-D15UWT86C	
LED (DS2)	LED green • Dialight598-8070-107F • VishayTLMG1100-GS15 • ROHMSML-D15MWT86C	

Table 4-54 Motherboard design guide – Recommended components

4.3 Design guidelines

Use the requirements in this section to integrate the Module correctly and reliably.

While designing a motherboard, consider the following characteristics:

- Pin assignment (→page 3-18)
- Technical data (→page 2-9) and dimensional drawing (→page 2-14)

4.3.1 Ground

All ground connections (GND) should be internally connected to the Module (equal potential). It is customary to equip the motherboard with a ground plane. You should connect all ground connections to the voltage supply ground via wide conductive tracks.

Pin	Signal	Description
A1...A3	GND	Ground
C3, C16, C40, C45	GND	Ground

Table 4-55 Motherboard design guide – Grounding

If an earth potential is in place or required, you should connect the ground plane to the earth potential via one or more capacitors and one resistor. It is recommended to use ceramic capacitors with 10 nF and a minimum of 100 VDC and a resistor with 2 M Ω .

4.3.2 Layout


Guidelines for the layout of the motherboard:

- Connect terminal header pins (A4), (A5), and (A6) for nominal power supply voltage (V_{CC}) to the fuse via wide conductive tracks.
- Connect terminal header pins (A1), (A2), (A3), (C3), (C16), (C40), and (C45) for GND (ground) to the operating voltage ground via wide conductive tracks.
- The width of the conductive tracks and the copper coating thickness of the conductors for supply voltage and motor depend on the current required in your application. A minimum track width of 40 mm (1'575 mil) and a minimum copper coating thickness of 35 μm are recommended. The track width can be achieved using multilayer designs with distributed tracks.

For an example of the recommended motherboard layout, refer to the →maxon: ESCON2 Module 60/30 motherboard HDK (Altium Reference Design) [4].

4.3.3 SMT footprint

→Figure 4-40 shows the recommended SMT footprints and the mounting-hole pattern. For the Altium footprint data, refer to the →maxon: ESCON2 Module 60/30 motherboard HDK (Altium Reference Design) [4].

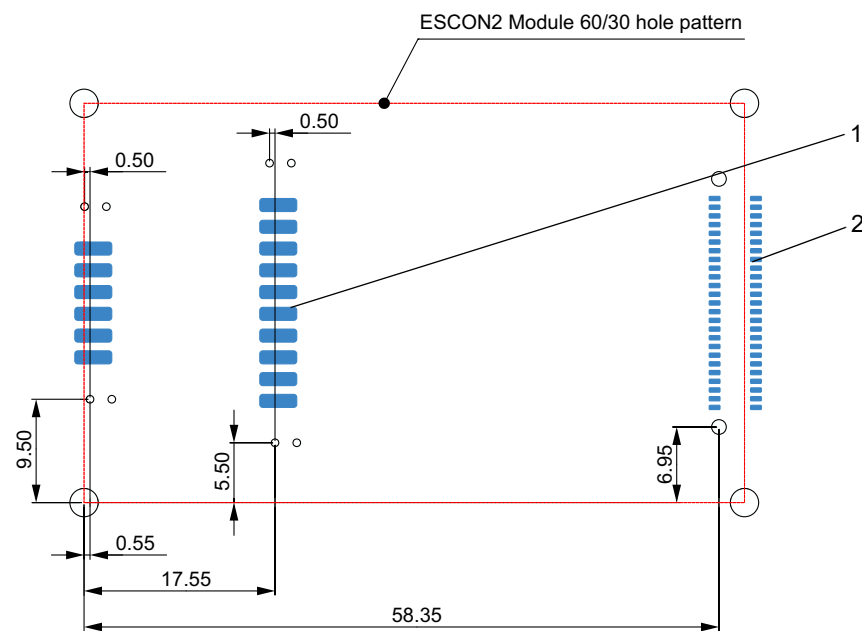

Pos.	Connector	Solder pad	Pitch
1	Samtec UMPT, 6- und 10-polig	1.25 × 3.50 mm (typ.)	2.00 mm (typ.)
2	Samtec ERM8, 2 × 25-polig	0.50 × 1.10 mm (typ.)	0.80 mm (typ.)

Figure 4-40 SMT footprint [mm] – Top view

4.3.4 Mounting of the Module

The motherboard must support mounting the Module using its five mounting holes, which are surrounded by GND circular rings. Utilize electrically and thermally conductive mounting materials to reduce the electrical load on the GND pins (see → Table 4-55 on page 4-54) and to enhance heat dissipation of the Module. Ensure the mounting points on the motherboard establish a connection between the mounting parts and the motherboard's ground plane.

••page intentionally left blank••

5 WIRING

This section provides wiring information for your setup. You can either use the consolidated wiring diagrams (see →Figure 5-42) featuring the full scope of interconnectivity and pin assignments, or you may use the connection overviews for either DC motor or EC (BLDC) motor to determine the wiring for your particular motor type and the appropriate feedback signals.

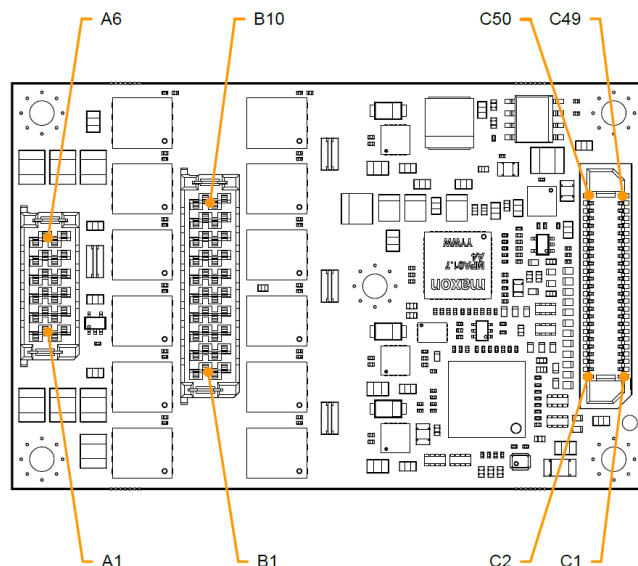


Figure 5-41 Interfaces – Designations and location



Signs and abbreviations used

The subsequent diagrams feature these signs and abbreviations:

- «EC motor» stands for brushless EC motor (BLDC).
-  Ground safety earth connection (optional).

5.1 Possible combinations to connect a motor

The following tables show feasible ways to connect the motor with its respective feedback signals or possible combinations thereof. To find the wiring that best suits your setup, proceed as follows:

- 1) Decide on the type of motor you are using and go to the respective subsection;
For DC motor, see →Chapter “5.1.1 DC motor” on page 5-58 or
For EC (BLDC) motor, see →Chapter “5.1.2 EC (BLDC) motor” on page 5-58.
- 2) Connect the power supply and the logic supply as shown in the referenced figure.
- 3) Check-out the listing for the combination that best suits your setup. Pick the wiring method number and go to the respective table;
For DC motor see →Table 5-56,
For EC (BLDC) motor see →Table 5-57.
- 4) Pick the row with the corresponding wiring method number and refer to the listed figure(s) to find the relevant wiring information.

5.1.1 DC motor

Power supply

Power supply and logic supply Figure 5-43 / Figure 5-44

Motor & feedback signals

Without sensor Method # DC1 [a]

Digital incremental encoder Method # DC2

SSI / BiSS C unidirectional absolute encoder Method # DC3

Method #	Sensor 2		➔Figure(s)
	Digital incremental encoder	SSI / BiSS C unidirectional absolute encoder	
DC1 [a]			5-45
DC2	✓		5-45 5-48
DC3		✓	5-45 5-49

[a] For method # DC1, only the operating mode current control can be used.

Table 5-56 Possible combinations of feedback signals for DC motor

5.1.2 EC (BLDC) motor

Power supply

Power supply and logic supply Figure 5-43 / Figure 5-44

Motor & feedback signals

Hall sensors Method # EC1

Hall sensors & Digital incremental encoder Method # EC2


Hall sensors & SSI / BiSS C unidirectional absolute encoder Method # EC3

SSI / BiSS C unidirectional absolute encoder Method # EC4

Method #	Sensor 1	Sensor 2		➔Figure(s)
	Hall sensors	Digital incremental encoder	SSI / BiSS C unidirectional absolute encoder	
EC1	✓			5-46 5-47
EC2	✓	✓		5-46 5-47 5-48
EC3	✓		✓	5-46 5-47 5-49
EC4			✓	5-46 5-49

Table 5-57 Possible combinations of feedback signals for EC (BLDC) motor

5.2 Main wiring diagram

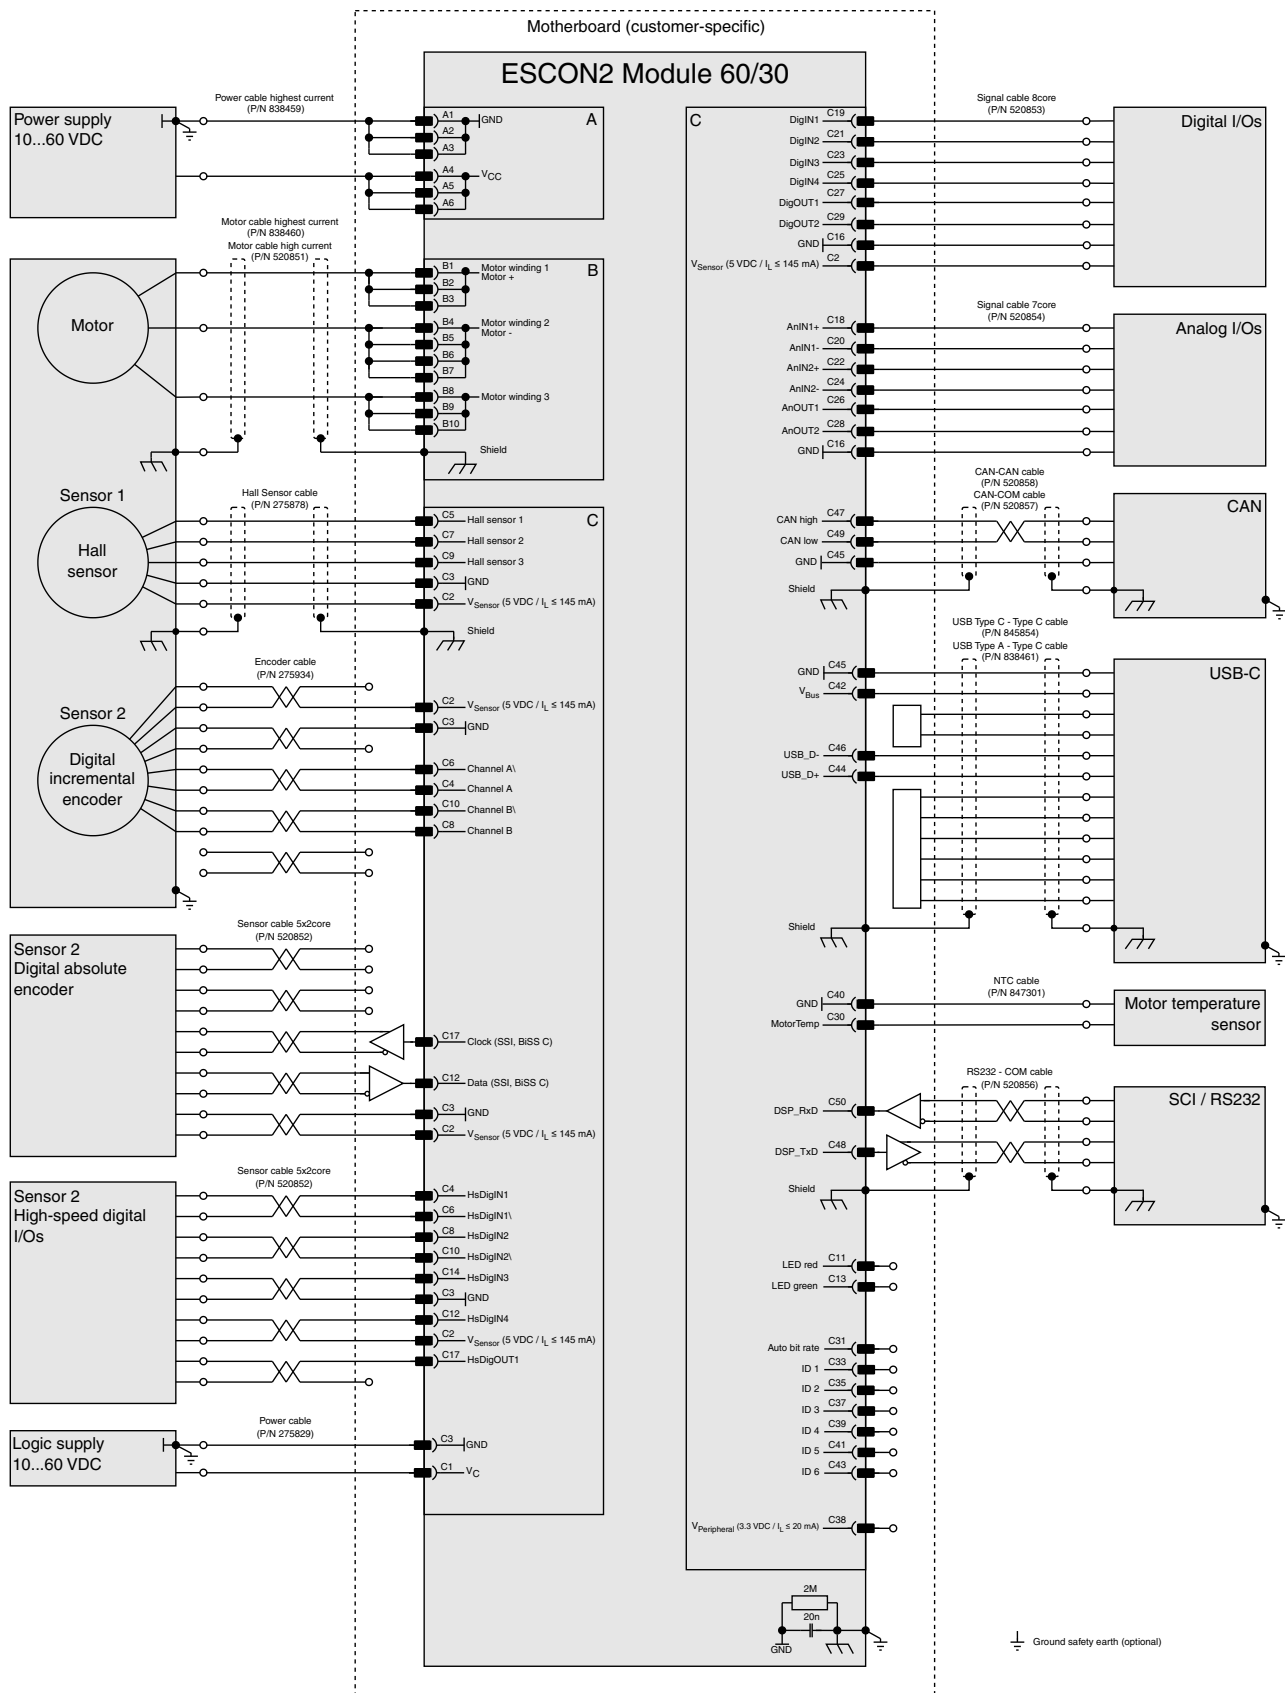

5.3 Cabling

Utilize maxon's prefab cable assemblies to streamline your setup process. These ready-to-use cables can significantly reduce commissioning time. Refer to the table below for a list of compatible prefab cables and the corresponding connectors needed for motherboard installation.

For detailed information on these prefab cables, visit maxon's website and use the part number to access more information.

Designation	Prefab cable assembly			Required connector on motherboard (or similar)
	Part Number	For connection of external device Head B	For connection on motherboard Head A	
Power cable highest current (for power supply)	838459	Wire end sleeves 4 mm ²	Molex Mini-Fit Sr., 2 poles (428160212)	Molex Mini-Fit Sr., 2 poles (428192214)
Power cable (for separate logic supply)	275829	Wire end sleeves 0.75 mm ²	Molex Mini-Fit Jr., 2 poles (39012020)	Molex Mini-Fit Jr., 2 poles (39281023)
Motor cable highest current (for currents higher than 20 A)	838460	Wire end sleeves 4 mm ²	Molex Mini-Fit Sr., 3 poles (428160312)	Molex Mini-Fit Sr., 3 poles (428193214)
Motor cable high current (for currents up to 20 A)	520851	Wire end sleeves 2.5 mm ²	Molex Mega-Fit, 4 poles (1716920104)	Molex Mega-Fit, 4 poles (1720650204)
Hall Sensor cable	275878	Wire end sleeves 0.14 mm ²	Molex Micro-Fit 3.0, 6 poles (430250600)	Molex Micro-Fit 3.0, 6 poles (430450612)
Encoder cable	275934	DIN 41651 plug, pitch 2.54 mm, 10 poles	DIN 41651 female, pitch 2.54 mm, 10 poles	Amphenol ICC (52601-S10-8TLF)
Sensor cable 5x2core (for absolute encoder or high-speed digital I/Os)	520852	Wire end sleeves 0.14 mm ²	Molex CLIK-Mate, 10 poles (5031491000)	Molex CLIK-Mate, 10 poles (5031481090)
Signal cable 8core (for digital I/Os)	520853	Wire end sleeves 0.14 mm ²	Molex CLIK-Mate, 8 poles (5025780800)	Molex CLIK-Mate, 8 poles (5025840860)
Signal cable 7core (for analog I/Os)	520854	Wire end sleeves 0.14 mm ²	Molex CLIK-Mate, 7 poles (5025780700)	Molex CLIK-Mate, 7 poles (5025840760)
CAN-CAN cable	520858	Molex CLIK-Mate, 4 poles (5025780400)	Molex CLIK-Mate, 4 poles (5025780400)	Molex CLIK-Mate, 4 poles (5025840470)
CAN-COM cable	520857	Female D-Sub connector DIN 41652, 9 poles	Molex CLIK-Mate, 4 poles (5025780400)	Molex CLIK-Mate, 4 poles (5025840470)
USB Type C – Type C cable	845854	USB Type C connector	USB Type C connector	Würth Elektronik (632722110112)
USB Type A – Type C cable	838461	USB Type A connector	USB Type C connector	Würth Elektronik (632722110112)
NTC cable	847301	Wire end sleeves 0.5 mm ²	Molex Micro-Fit 3.0, 2 poles (430250200)	Molex Micro-Fit 3.0, 2 poles (430450212)
RS232 – COM cable	520856	Female D-Sub connector DIN 41652, 9 poles	Molex CLIK-Mate, 5 poles (5025780500)	Molex CLIK-Mate, 5 poles (5031750500)

Table 5-58 Prefab maxon cables

5.4 Excerpts

Depending on the connections, additional components are required to be installed on the motherboard. Detailed information can be found in →Chapter “4.2 Requirements for components of third-party suppliers” on page 4-43.

5.4.1 Power supply

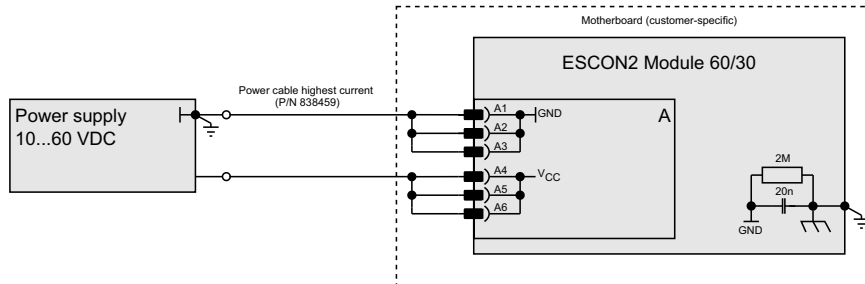


Figure 5-43 Power supply

For additional components that are recommended for installation on the motherboard refer to →Chapter “4.2.2 Power supply voltage” on page 4-44.

5.4.2 Logic supply

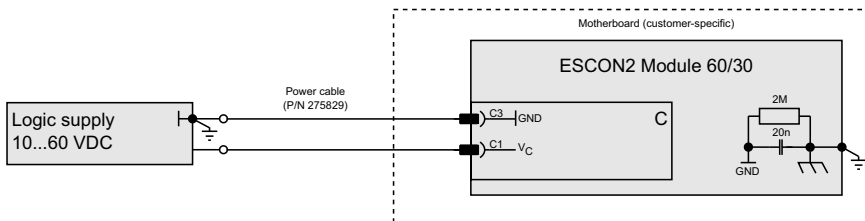


Figure 5-44 Logic supply

For additional components that are recommended for installation on the motherboard refer to →Chapter “4.2.3 Logic supply voltage” on page 4-45.

5.4.3 DC motor


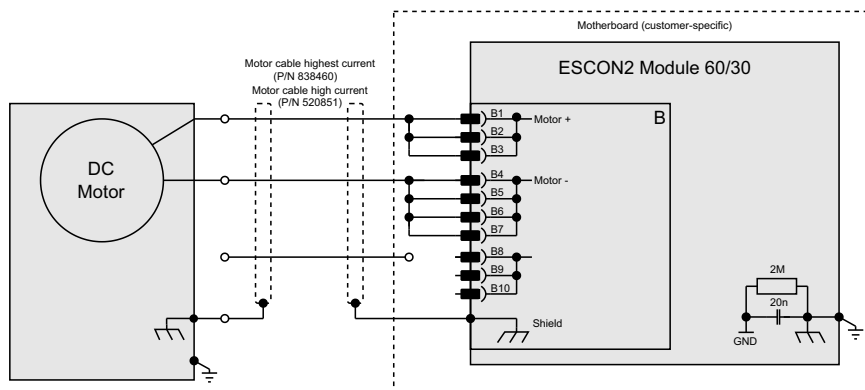


Figure 5-45 DC motor

For additional components that are recommended for installation on the motherboard refer to →Chapter “4.2.4 Motor chokes” on page 4-46.

5.4.4 EC (BLDC) motor



The "Motor cable high current" (P/N 520851) can be used for currents up to 20 A. For higher currents, the "Motor cable highest current" (P/N 838460) must be used.

The diagram illustrates the connection between a Hall Sensor and the ESCON2 Module 60/30. The Hall Sensor is connected to a Hall Sensor cable (P/N 275878) which has six conductors. These conductors are connected to the ESCON2 Module 60/30 as follows:

- C5: Hall sensor 1
- C7: Hall sensor 2
- C9: Hall sensor 3
- C3: GND
- C2: V_{Sensor} (5 VDC / I_L ≤ 145 mA)
- Shield: Connected to ground

The ESCON2 Module 60/30 is a customer-specific motherboard. A 2MΩ resistor and a 20nF capacitor are connected to the V_{Sensor} line. The module is labeled 'Motherboard (customer-specific)' and 'ESCON2 Module 60/30'.

Figure 5-47 Sensor 1 Hall sensor

5.4.6 Sensor 2 Encoder / I/Os

5.4.6.1 Digital incremental encoder

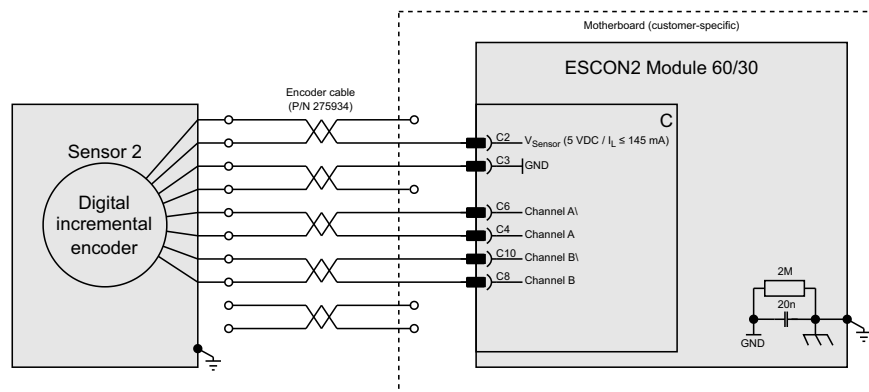


Figure 5-48 Digital incremental encoder

This interface can handle a digital incremental encoder, an SSI / BiSS C digital unidirectional absolute encoder or high-speed digital I/O's. Only one out of these three functions can be used at the same time.

5.4.6.2 SSI / BiSS C unidirectional absolute encoder

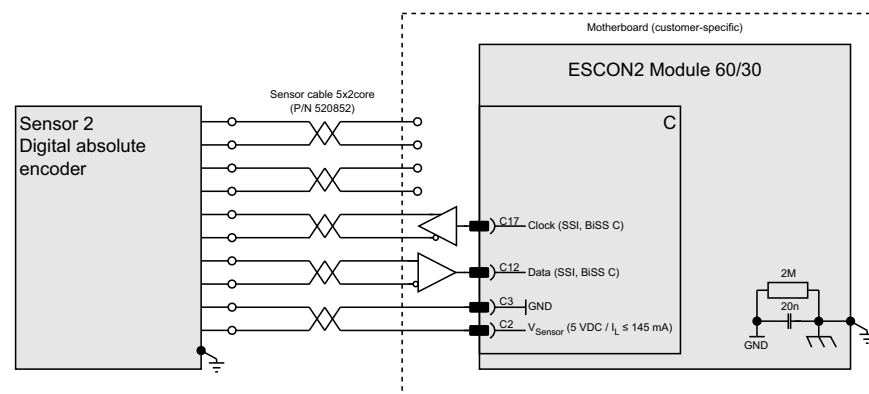


Figure 5-49 SSI / BiSS C unidirectional absolute encoder

An additional RS422 transceiver (line driver/receiver) is required on the motherboard for cable lengths over 30 cm or if differential signals shall be used. A wiring example is provided in → Chapter "4.2.9 RS422 transceiver for differential SSI, BiSS C or high-speed I/Os signals" on page 4-50.

This interface can handle a digital incremental encoder, an SSI / BiSS C digital unidirectional absolute encoder or high-speed digital I/O's. Only one out of these three functions can be used at the same time.

5.4.6.3 High-speed digital I/Os

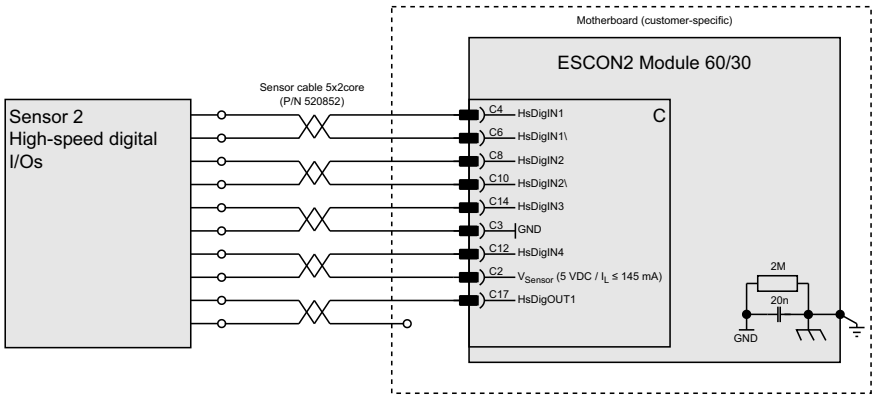


Figure 5-50 High-speed digital I/Os

An additional RS422 transceiver (line driver/receiver) is required on the motherboard if differential signals shall be used for HSDigIN3, HSDigIN4 or HSDigOUT1. A wiring example is provided in →Chapter “4.2.9 RS422 transceiver for differential SSI, BiSS C or high-speed I/Os signals” on page 4-50.

This interface can handle a digital incremental encoder, an SSI / BiSS C digital unidirectional absolute encoder or high-speed digital I/O's. Only one out of these three functions can be used at the same time.

5.4.7 Digital I/Os

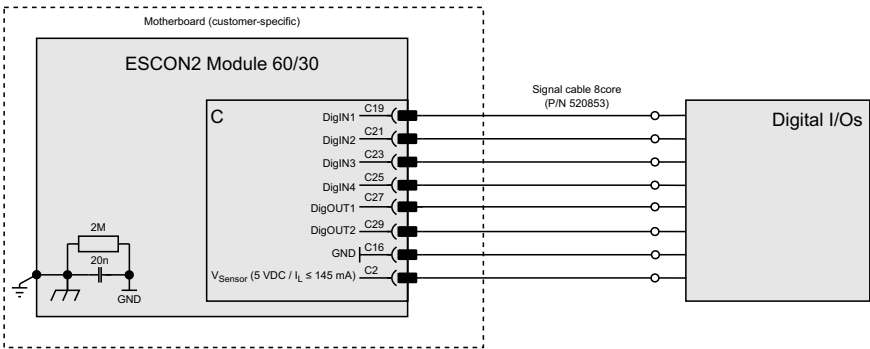


Figure 5-51 Digital I/Os

5.4.8 Analog I/Os

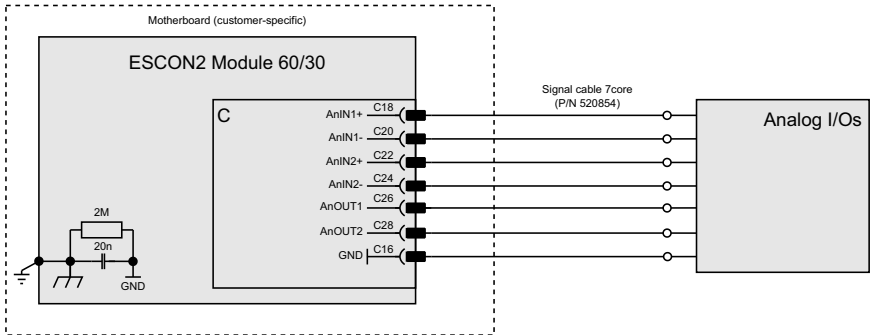


Figure 5-52 Analog I/Os

5.4.9 SCI / RS232

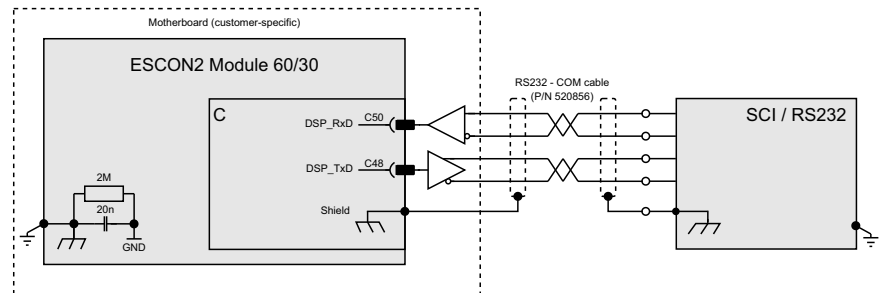


Figure 5-53 SCI / RS232

An additional RS232 transceiver (line driver/receiver) is necessary on the motherboard to use the serial communication interface with an external RS232 master. For board level operation, the serial interface can be used for direct connection. A wiring example is provided in ➔Chapter “4.2.8 RS232 Interface” on page 4-49.

5.4.10 CAN

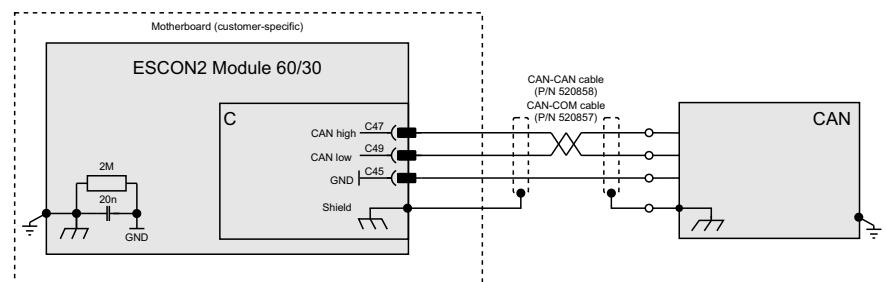


Figure 5-54 CAN

Depending on the preferred interface, one of the two prefab CAN cables can be used.

5.4.11 USB

5.4.11.1 USB-C

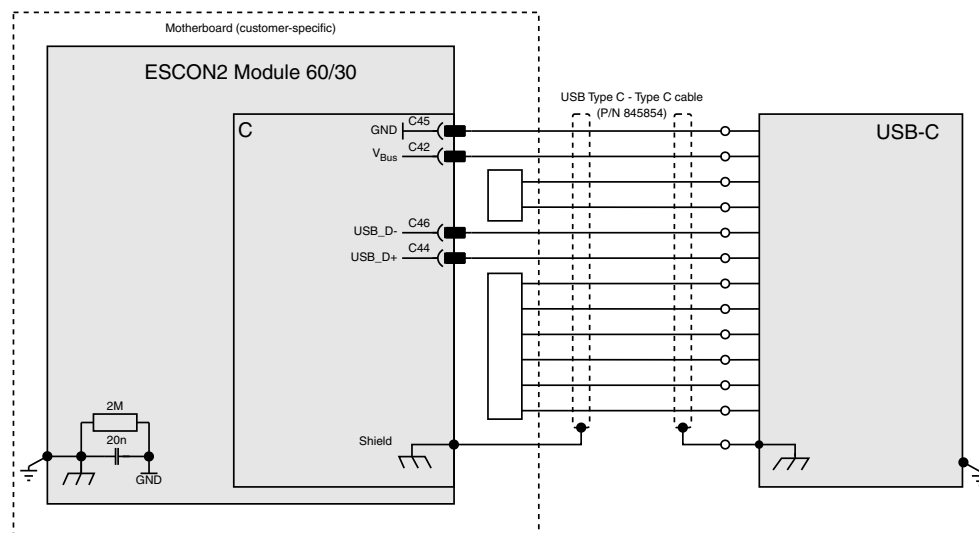


Figure 5-55 USB-C

The wiring above considers the installation of an USB-C connector with additionally required parts on the motherboard. Such a connector is required if the prefab cable shall be used. A wiring example is provided in ➔Chapter “4.2.5 USB interface” on page 4-47.

5.4.11.2 USB-A

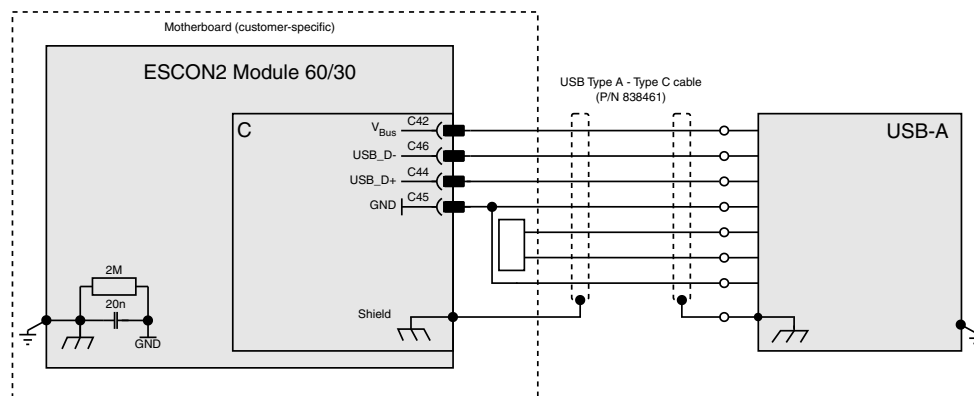


Figure 5-56 USB-A

The wiring above considers the installation of an USB-C connector with additionally required parts on the motherboard. Such a connector is required if the prefab cable shall be used. A wiring example is provided in ➔Chapter “4.2.5 USB interface” on page 4-47.

5.4.12 Motor temperature sensor (future release)

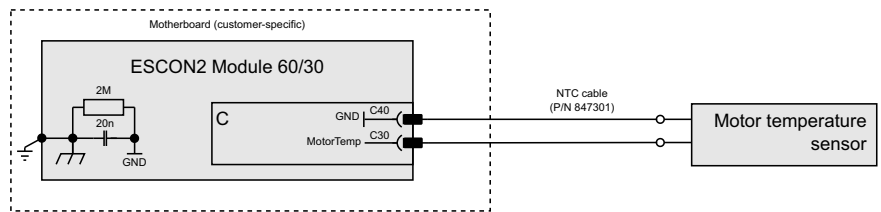


Figure 5-57 Motor temperature sensor

••page intentionally left blank••

LIST OF FIGURES

Figure 1-1	Documentation structure	5
Figure 2-2	Derating of output current (operation without additional heatsink)	11
Figure 2-3	Extended operation @ VCC 60 VDC with additional heatsink	12
Figure 2-4	Heat spreader dimensional drawing [mm].	13
Figure 2-5	Power dissipation and efficiency	13
Figure 2-6	Dimensional drawing [mm]	14
Figure 3-7	Pin assignment	18
Figure 3-8	Hall sensor 1 input circuit (analogously valid for Hall sensors 2 & 3)	23
Figure 3-9	Digital incremental encoder input circuit Ch A “differential” (analogously valid for Ch B)	25
Figure 3-10	Digital incremental encoder input circuit Ch A “single-ended” (analogously valid for Ch B)	26
Figure 3-11	SSI absolute encoder data input (analogously valid for BiSS C)	27
Figure 3-12	SSI absolute encoder clock output (analogously valid for BiSS C)	28
Figure 3-13	HsDigIN1 circuit “differential” (analogously valid for HsDigIN2)	29
Figure 3-14	HsDigIN1 circuit “single-ended” (analogously valid for HsDigIN2...3)	30
Figure 3-15	HsDigIN4 circuit “single-ended”	30
Figure 3-16	Wiring examples for proximity sensors and switches on HsDigIN1 (analogously valid for HsDigIN2)	31
Figure 3-17	HsDigOUT1 circuit.	31
Figure 3-18	Wiring examples for “sourcing” on HsDigOUT1	31
Figure 3-19	DigIN1 circuit (analogously valid for DigIN2).	32
Figure 3-20	DigIN3 circuit (analogously valid for DigIN4).	33
Figure 3-21	Wiring examples for proximity sensors and switches on DigIN1 (analogously valid for DigIN2...4)	33
Figure 3-22	DigOUT1 circuit (analogously valid for DigOUT2).	34
Figure 3-23	Wiring examples for “sourcing” on DigOUT1 (analogously valid for DigOUT2)	34
Figure 3-24	AnIN1 circuit (analogously valid for AnIN2).	35
Figure 3-25	Wiring examples for a potentiometer on AnIN1 (analogously valid for AnIN2)	35
Figure 3-26	AnOUT1 circuit (analogously valid for AnOUT2).	36
Figure 3-27	SCI circuit	37
Figure 3-28	Motor temperature circuit	40
Figure 3-29	LED green circuit (analogously valid for LED red)	41
Figure 4-30	Wiring of power supply	44
Figure 4-31	Wiring of logic supply	45
Figure 4-32	Wiring of motor winding 1 (analogously valid for motor winding 2 & 3).	46
Figure 4-33	Wiring of USB-C connector	47
Figure 4-34	Wiring of CAN interface.	48
Figure 4-35	Wiring of Serial Communication Interface (SCI) not used.	49
Figure 4-36	Wiring of RS232 Interface	49
Figure 4-37	Wiring of RS422 transceiver	50
Figure 4-38	Wiring of digital output 1 load switch (analogously valid for digital output 2)	50
Figure 4-39	Wiring of LEDs for device status indication	51
Figure 4-40	SMT footprint [mm] – Top view	55
Figure 5-41	Interfaces – Designations and location	57

Figure 5-42	Main wiring diagram	59
Figure 5-43	Power supply	61
Figure 5-44	Logic supply	61
Figure 5-45	DC motor	61
Figure 5-46	EC (BLDC) motor	62
Figure 5-47	Sensor 1 Hall sensor	62
Figure 5-48	Digital incremental encoder	63
Figure 5-49	SSI / BiSS C unidirectional absolute encoder	63
Figure 5-50	High-speed digital I/Os	64
Figure 5-51	Digital I/Os	64
Figure 5-52	Analog I/Os	64
Figure 5-53	SCI / RS232	65
Figure 5-54	CAN	65
Figure 5-55	USB-C	66
Figure 5-56	USB-A	66
Figure 5-57	Motor temperature sensor	67

LIST OF TABLES

Table 1-1	Notations used in this document	6
Table 1-2	Symbols and signs	6
Table 1-3	Sources for additional information.	7
Table 2-4	Technical data	10
Table 2-5	Heatsink – tested components	12
Table 2-6	Thermal accessories – specification	12
Table 2-7	Limitations	14
Table 2-8	Standards	15
Table 3-9	Pin assignment A1...A6	18
Table 3-10	Pin assignment B1...B10	18
Table 3-11	Pin assignment C1...C50	20
Table 3-12	Power supply – Pin assignment	20
Table 3-13	Power supply requirements.	20
Table 3-14	Logic supply – Pin assignment	21
Table 3-15	Logic supply requirements	21
Table 3-16	Output voltages – Pin assignment.	22
Table 3-17	EC motor – Pin assignment.	22
Table 3-18	DC motor – Pin assignment	22
Table 3-19	Hall sensor – Pin assignment	23
Table 3-20	Hall sensor specification	23
Table 3-21	Incremental encoder – Pin assignment.	24
Table 3-22	Differential digital incremental encoder specification	24
Table 3-23	Single-ended digital incremental encoder specification	25
Table 3-24	SSI / BISS C unidirectional absolute encoder – Pin assignment	26
Table 3-25	SSI / BISS C unidirectional absolute encoder specification.	27
Table 3-26	Single-ended SSI / BISS C unidirectional absolute encoder data channel specification	27
Table 3-27	Single-ended SSI / BISS C unidirectional absolute encoder clock channel specification	27
Table 3-28	High-speed digital I/Os – Pin assignment	28
Table 3-29	Differential high-speed digital inputs specification.	28
Table 3-30	Single-ended high-speed digital input specification	29
Table 3-31	High-speed digital output specification	31
Table 3-32	Digital I/Os – Pin assignment	32
Table 3-33	Digital inputs 1...2 specification.	32
Table 3-34	Digital inputs 3...4 specification.	33
Table 3-35	Digital output specification.	34
Table 3-36	Analog I/O – Pin assignment.	34
Table 3-37	Analog input specification	35
Table 3-38	Analog output specification	36
Table 3-39	SCI – Pin assignment	37
Table 3-40	SCI specification	37
Table 3-41	CAN – Pin assignment	38

Table 3-42	CAN interface specification	38
Table 3-43	CAN Auto bit rate / ID – Pin assignment	38
Table 3-44	CAN ID specification.	39
Table 3-45	ID – Examples	39
Table 3-46	Bit rate detection specification	39
Table 3-47	USB – Pin assignment	40
Table 3-48	USB interface specification.	40
Table 3-49	Motor temperature sensor – Pin assignment	40
Table 3-50	Motor temperature sensor – specifications.	40
Table 3-51	Device Status LEDs	41
Table 3-52	Device status outputs - Pin assignment	41
Table 3-53	Device status output specification	41
Table 4-54	Motherboard design guide – Recommended components.	54
Table 4-55	Motherboard design guide – Grounding	54
Table 5-56	Possible combinations of feedback signals for DC motor	58
Table 5-57	Possible combinations of feedback signals for EC (BLDC) motor	58
Table 5-58	Prefab maxon cables	60

INDEX

A

- alerts 6
 - CAUTION 6
 - DANGER 6
 - WARNING 6
- analog
 - inputs 35
 - outputs 36

B

- BiSS C 26
- BiSS C unidirectional absolute encoder 27
- bit rate
 - CAN 38
 - default 37, 38
 - detection 39
 - SCI 37

C

- CAN
 - bit rate 38
 - bus termination 38
 - ID (see "ID")
 - interface 38
- choke, motor 9, 46
- codes (used in this document) 6
- country-specific regulations 8

D

- digital
 - inputs 32, 33
 - outputs 34
- digital high-speed
 - inputs (differential) 28
 - inputs (single-ended) 29
 - output 31
- digital incremental encoder
 - (differential) 24
 - (single-ended) 25
- directive EU, applicable 17

E

- encoders
 - absolute 27
 - differential 24
 - incremental 24
 - single-ended 27
 - SSI / BiSS C unidirectional absolute encoder 27
- ESD 8
- EU directive, applicable 17

H

- Hall sensor 23
- high-speed digital
 - inputs (differential) 28

- inputs (single-ended) 29
- output 31
- how to
 - calculate the required supply voltage 21
 - get help in designing the motherboard 43
 - interpret icons (and signs) used in this document 6

I

- ID (of the device) 39
- incorporation into surrounding system 17
- incremental encoder 24
- informatory signs 6
- inputs
 - (differential) 28
 - (single-ended) 29
 - analog 35
 - digital 32, 33
 - high-speed digital 28
- interfaces
 - CAN 38
 - designation and location 57
 - serial communication interface (SCI) / RS232 37
 - USB 39, 40
- internal motor chokes 9, 46

L

- LED 41
- logic supply 21

M

- mandatory action signs 6
- motor choke 9, 46
- motor connection 22
- motor temperature sensor 40

N

- Node-ID (see "ID")
- notations (used in this document) 6

O

- outputs
 - analog 36
 - digital 34
 - high-speed digital 31

P

- part numbers
 - 235811 52
 - 520851 62
 - 783722 7, 9
 - 783729 7, 43
 - 783734 7, 10, 12, 43
 - 802197 12
 - 816161 12
 - 838460 62
- performance data 9

- pin assignment 18
- power supply 20
- precautions 8
- prerequisites prior installation 17
- prohibitive signs 6
- purpose
 - of the device 7
 - of the document 5

R

- RS232 transceiver 49

S

- safety alerts 6
- safety first! 8
- SCI
 - bit rate 37
 - Serial Communication Interface 49
- serial encoder 26
- signs used 6
- SSI 27
- SSI absolute encoder 27
- standards, fulfilled 15
- status LEDs 41
- supply voltage, required 21
- symbols used 6

T

- technical data 9
- termination (CAN bus) 38

U

- USB 39

W

- wiring examples
 - analog I/Os 64
 - CAN 65
 - DC motor 61
 - digital I/Os 64
 - digital incremental encoder 63
 - EC (BLDC) motor 62
 - high-speed digital I/Os 64
 - logic supply 61
 - motor temperature sensor 67
 - power supply 61
 - SCI / RS232 65
 - sensor 1 hall sensor 62
 - sensor 2 encoder I/Os 63
 - SSI / BiSS C unidirectional absolute encoder 63
 - USB-A 66
 - USB-C 66

••page intentionally left blank••

